



ST 760 ULTRA SPORT



Two rib design compatible
with above 255 mm
section width sizes

Starmaxx Passenger 4x4-SUV, LTR Tires are characterized by
quality craftsmanship, leading edge technology,
unique tread design and excellent performance offering
perfect mix of quality and value.

MADE IN TÜRKİYE



Headquarters - Factory

Petlas Tire Industry and Trade
Kındam Mahallesi Ankara - Kayseri Caddesi
No: 2/1 Kırşehir / TÜRKİYE
T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade
Ako Kule, Söğütözü Mh. 2178. Cd. No: 6
06530 Ankara / TÜRKİYE
T. +90 312 309 30 30 • F.+90 312 310 95 09

Petlas Tire USA

1111 E. Lincolnway STE 205
Cheyenne, WY 82001 USA

www.starmaxx.com



ST 760 ULTRA SPORT

starmaxx


ST 760 ULTRA SPORT

starmaxx

TECHNICAL HIGHLIGHTS


- Center block contacts the surface and provides a stable and balanced drive.
- High performance on both dry and wet roads with asymmetrical pattern.
- Reinforced and wide shoulder block increases the surface amount contacting the road and enhances dry grip performance with high curving capability and maneuverability. Provides resistance against asymmetrical wear.
- Intensely designed outer side provides better grip on dry and wet roads and increases the stability of the vehicle thanks to its special canal structure.
- Minimised road / pattern noise enhances driving comfort with computer designed block array.
- Fast and effective water discharge with three circumferential canals.

RAYON CORD & HYBRID "O" BELT

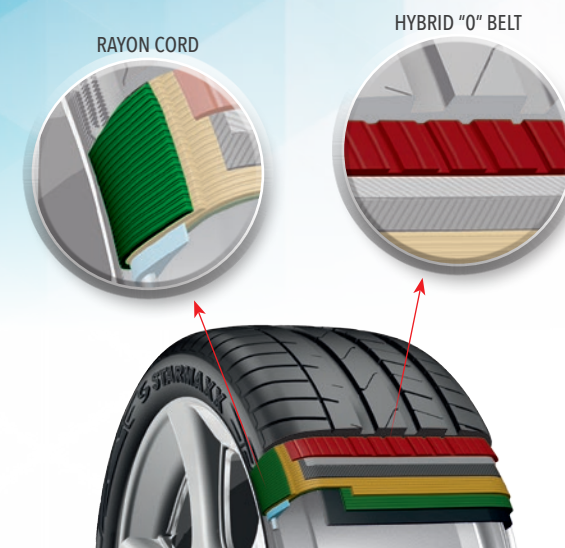

Nylon JLB and Hybrid JLB are very similar technologies whereas Hybrid JLB belt delivers somewhat more durability, handling performance and comfort on high speed levels. Hybrid technologies are available in ST760 Ultra Sport's range along with rayon carcass which improves handling.

NYLON JLB & HYBRID JLB

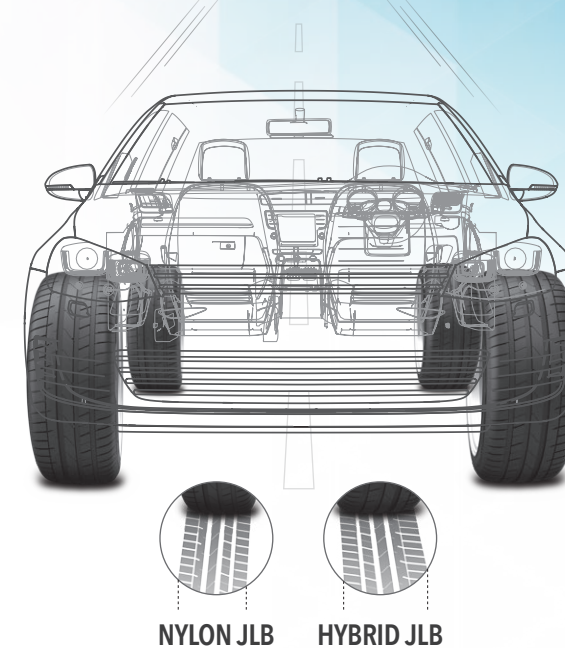

Growth difference at high speed between NYLON JLB and HYBRID JLB

BENEFITS OF HYBRID JLB



ROAD GRIP



Delivers best result on dry and wet grip performance

HANDLING



Increases safety by maintaining tire's contact with the road


DURABILITY



Increase tire's wear resistance at high speed

EU LABEL

Average values from all size, on this specific model.

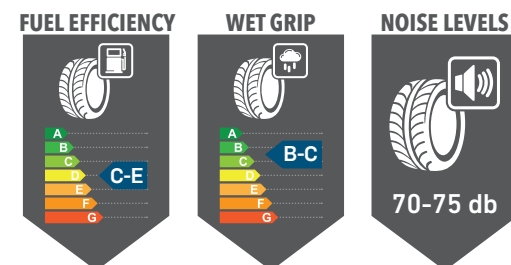

TECHNOLOGY & BENEFITS



LOW FUEL CONSUMPTION

Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions. Rolling resistance is reduced significantly, resulting in lower fuel consumption.



HANDLING

High tech cap ply construction enhances uniformity for a smoother ride while improving durability and resistance against tread wear.




CORNERING PERFORMANCE

Jointless mono strand bead wire and hard bead filler improve lateral stability in high speed cornering and uniformity for smoother ride.


POSITIONING MAP



COMPETITOR ANALYSIS

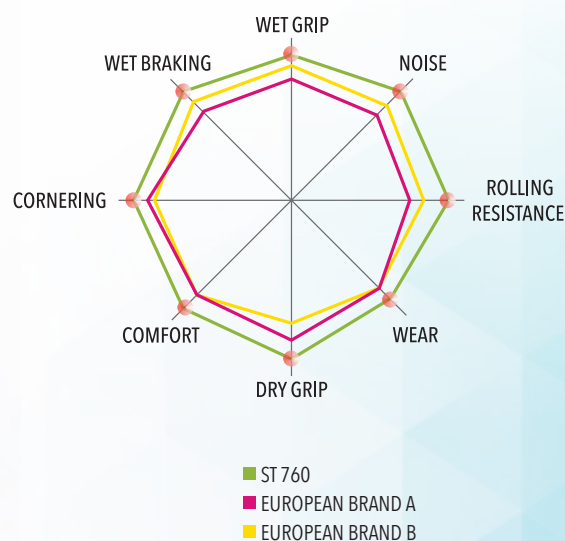

PERFORMANCE RATINGS

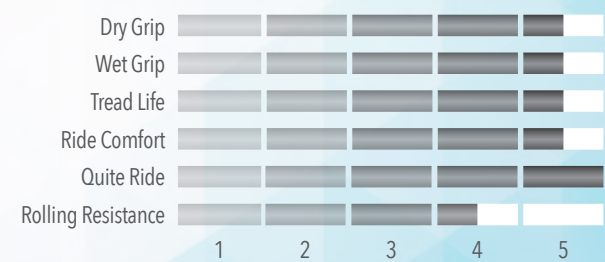


ALL SIZES

215/60R 16	99V	225/45R 17 RF	94W	265/40Z 18 RF	101Y	215/40R 18 RFT *
225/60R 16	98V	225/45R 17 RFT	91W	265/40Z 19 RF	102W	245/40R 20 RFT *
235/60Z 16	100W	225/45Z 18 RF	95W	275/40Z 18 RF	103Y	275/40R 18 RFT *
185/55R 15	80V	225/45R 18 RFT	91W	275/40Z 19 RF	105Y	205/35R 18 *
185/55R 16 RF	82V	225/45Z 19 RF	96W	275/40RF 19 RFT	101Y	225/35R 19 *
195/55R 15	87H	235/45Z 17 RF	97W	285/40Z 19 RF	107W	225/35R 20 RFT *
195/55R 16	85V	235/45Z 18 RF	98W	215/35Z 18 RF	84W	245/35R 18 RFT *
195/55R 16 RFT	87V	235/45Z 19 RF	99W	215/35Z 19 RF	85W	265/35R 20 *
205/55Z 16 RF	87V	245/45Z 17 RF	99W	225/35Z 18 RF	87W	275/35R 18 RFT *
205/55R 16 RFT	94W	245/45Z 18 RF	100W	255/35RF 19 RF	88Y	275/35R 20 *
205/55Z 17 RF	91V	245/45R 18 RFT	96W	225/35Z 20 RF	90Y	275/35R 20 RFT *
205/55Z 17 RFT	95W	245/45Z 19 RF	102W	235/35Z 19 RF	91W	285/35R 18 RFT *
205/55Z 17	91W	245/45R 19 RFT	98W	245/35Z 17	87W	285/35R 19 *
215/55Z 16 RF	97W	255/45Z 18 RF	103W	245/35Z 18 RF	92W	285/35R 19 RFT *
215/55Z 17 RF	98W	255/45Z 19 RF	104Y	245/35Z 19 RF	93W	295/35R 18 *
225/55Z 16 RF	99W	275/45Z 18 RF	107W	245/35RF 19 RF	93Y	295/35R 19 *
225/55Z 17 RF	101W	205/40Z 16 RF	83W	245/35Z 20 RF	95W	295/35R 20 *
225/55R 17 RFT	97W	205/40Z 17 RF	84W	245/35RF 20 RF	95Y	225/30R 20 *
235/55Z 17 RF	103W	215/40Z 16 RF	86W	255/35Z 18 RF	94Y	235/30R 20 *
235/55Z 18 RF	104W	215/40Z 17 RF	87W	255/35Z 18 RF	94W	245/30R 19 *
195/50R 15	82V	215/40Z 18 RF	89W	255/35RF 18 RFT	90Y	245/30R 19 RFT *
195/50R 16	84V	225/40Z 18 RF	92W	255/35Z 19 RF	96W	245/30R 20 *
205/50Z 15	86W	225/40Z 18 RF	92Y	255/35RF 19 RFT	92W	255/30R 19 *
205/50Z 16 RF	91W	225/40RF 18 RFT	92Y	255/35Z 20 RF	97W	255/30R 20 *
205/50Z 17 RF	93W	225/40Z 19 RF	93W	265/35Z 18 RF	97W	255/30R 20 RFT *
205/50RF 17 RFT	89W	225/40RF 19 RF	93Y	265/35Z 19 RF	98W	265/30R 20 *
215/50Z 17 RF	95W	235/40Z 17 RF	94W	265/35Z 20 RF	99W	275/30R 20 RFT *
225/50Z 16 RF	96W	235/40Z 18 RF	95W	275/35Z 18 RF	99W	285/30R 19 *
225/50Z 17 RF	98W	245/40Z 17 RF	95W	275/35RF 18 RFT	95Y	285/30R 19 RFT *
225/50RF 17 RFT	94W	245/40Z 18	93W	275/35Z 19 RF	100W	285/30R 20 *
235/50Z 18 RF	101W	245/40Z 18	97W	275/35RF 19 RFT	96W	285/30R 20 RFT *
245/50Z 18	100W	245/40RF 18 RFT	93W	275/35Z 20 RF	102Y	295/30R 19 *
245/50RF 18 RFT	100W	245/40Z 19 RF	98W	285/35Z 18 RF	101W	295/30R 20 *
195/45R 16 RF	84V	245/40RF 19 RFT	94W	255/30RF 19 RF	91Y	305/30R 19 *
205/45Z 16 RF	87W	245/40Z 20 RF	99W	265/30Z 19 RF	93W	305/30R 20 *
205/45Z 17 RF	88W	255/40Z 18	95W	275/30Z 19 RF	96W	285/25R 20 *
215/45R 16 RF	90V	255/40RF 18 RFT	95Y	275/30RF 19 RF	96W	295/25R 20 *
215/45Z 17 RF	91W	255/40Z 19 RF	100W	275/30Z 20 RF	97W	305/25R 20 *
215/45Z 18 RF	93W	255/40Z 20 RF	101W	275/45R 18 RFT *		

RF : REINFORCED
RFT : RUN FLAT
RP : RIM PROTECTOR
* : UNDER DEVELOPMENT
•• : Two rib design compatible with above 255 mm section width sizes

RUN FLAT TECHNOLOGY

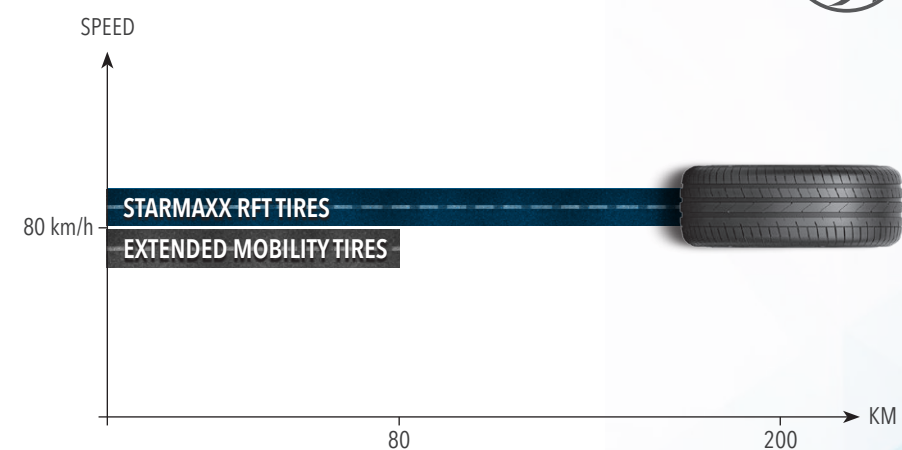

ECE R-30 regulation states that a Run Flat Tire has to run total distance of **80 km** on indoor drum test with '0' inflation pressure. Starmaxx Run-Flat tires are certified as 'Run Flat' according to ECE R-30. On outdoor tests, Starmaxx Run-Flat tires have reached the distance up to **200 km** without any integrity problems.