

PCR-4X4 & SUV LTR TIRES



 **starmaxx**
HIGH PERFORMANCE TIRES

Outstanding Driving Performance



 **starmaxx**
HIGH PERFORMANCE TIRES

CONTENTS

2 / Range of Starmaxx Tires

Passenger Tires
SUV, 4x4 Tires
LTR Tires

4 / Starmaxx Tires by Size

8 / General Information

Sidewall Markings
Radial Tire Construction
Important Definitions
Dimensions
Speed Symbol Table
Load Index Table

62 / Technical Data

PCR Tires
SUV, 4x4 Tires
LTR Tires

Passenger Tires

ST330	ST532	ST542	ST760	ST582	W860	PolarMaxx	PolarMaxx Sport
16	18	20	22	26	28	30	32

SUV, 4X4 Tires

ST430	ST440	ST450	SuvMaxx A/S	W870	W880
36	38	40	42	44	46

LTR Tires

ST850	ST850 Plus	ST860	ST950	ST960	VANMAXX A/S
50	52	54	56	58	60

Passenger Tires



ST330 TOLERO



W860 ArcTerrain
Winter Tire



ST532 NOVARO



PolarMaxx
Winter Tire



ST542 NATUREN



PolarMaxx Sport
Winter Tire



ST760 ULTRA SPORT



ST582 Maxx Out
All Weather Tire

SUV, 4x4 Tires



ST430 INCURRO A/S
All Weather Tire



SuvMaxx A/S
All Weather Tire



ST440 INCURRO A/T



W870 INCURRO
Winter Tire



ST450 INCURRO H/T



W880 INCURRO ICE
Winter Tire

LTR Tires



ST850 PROVAN



ST950 PROWIN
All Weather Tire



ST850 PROVAN PLUS



ST960 PROWIN
Winter Tire



ST860 PROVAN



VANMAXX A/S
All Weather Tire

ST330 Tolero

155/80 R12	77T
155/80 R13	79T
165/80 R13	83T
165/80 R13 RF	87R
175/80 R14	88T
165/80 R15	87T
145/70 R12	69T
155/70 R12	73T
165/70 R12	77T
175/70 R12	80T
145/70 R13	71T
155/70 R13	75T
165/70 R13	79T
165/70 R13 RF	83T
175/70 R13	82T
185/70 R13	86T
165/70 R14	81T
165/70 R14 RF	85R
175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
195/70 R14	91T
195/70 R15 RF	97T
155/65 R13	73T
165/65 R13	77T
175/65 R13	80T
155/65 R14	75T
165/65 R14	79T
175/65 R14	82T
175/65 R14 RF	86T
185/65 R14	86T
195/65 R14	89H
175/65 R15	84T
185/65 R15	88T
195/65 R15	91T
195/65 R15 RF	95T
165/60 R14	75T



ST532 Novaro

175/70 R13	82H
175/70 R14	84H
175/70 R14 RF	88H
185/70 R14	88H
175/65 R14	82H
175/65 R14 RF	86T
175/65 R15	84H
185/65 R14	86H
185/65 R15	88H
185/65 R15 RF	92H
195/65 R15	91H
195/65 R15	91V
195/65 R15 RF	95H
205/65 R15	94H
205/65 R15 RF	99H
205/65 R15	94V
215/65 R15	96V
205/65 R16	95H
215/65 R16	98H

215/65 R16	98V
175/60 R13	77H
185/60 R14	82H
195/60 R14	86H
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
195/60 R15	88V
205/60 R14	88V
205/60 R15	91H
205/60 R15	91V
205/60 R16	92H
205/60 R16	92V
205/60 R16 RF	96V
185/55 R15	82V
205/55 R15	88V
195/55 R16	87V
205/55 R16	91H
205/55 R16	91V
215/55 R16	93V
205/50 R15	86W



ST542 Naturen

175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
175/65 R14	82T
185/65 R14	86T
185/65 R15	88T
185/65 R15	88H
195/65 R15	91H
195/65 R15 RF	95T
195/65 R15	91V
205/65 R15	94H
185/60 R14	82H
185/60 R15	84H
185/60 R15 RF	88H
195/60 R15	88H
205/60 R16	92H
205/60 R16	92V
205/60 R16 RF	96V
215/60 R16	95V
185/55 R14	80H
185/55 R15	82V
195/55 R15	85H
195/55 R16	87H
205/55 R16	91H
195/50 R15	82H
195/50 R16 RF	88V



ST760 ULTRA SPORT

215/60 R16 RF	99V	215/40 R17 RF	87W
225/60 R16	98V	235/40 R17 RF	94W
235/60 R16	100W	245/40 R17 RF	95W
195/55 R15	85V	215/40 R18 RF	89W
185/55 R16 RF	87H	215/40 R18 RF RFT	85Y
195/55 R16	87V	225/40 R18 RF	92Y
195/55 R16 RFT	87V	225/40 R18 RF RFT	92Y
205/55 R16 RFT	91V	235/40 R18 RF	95W
205/55 R16 RF	94W	245/40 R18 RF	97W
215/55 R16 RF	97W	245/40 R18 RFT	93W
225/55 R16 RF	99W	255/40 R18	95W
205/55 R17 RF	95W	255/40 R18 RFT	95Y
215/55 R17 RF	98W	265/40 R18 RF	101Y
225/55 R17 RF	101W	275/40 R18 RF	103Y
225/55 R17 RFT	97W	275/40 R18 RF RFT	99Y
235/55 R17 RF	103W	225/40 R19 RF	93W
235/55 R18 RF	104W	225/40 R19 RF RFT	93Y
195/50 R15	82V	235/40 R19 RF	96Y
195/50 R16	84V	245/40 R19 RF	98W
205/50 R16 RF	91W	245/40 R19 RFT	94W
225/50 R16 RF	96W	255/40 R19 RF	100W
205/50 R17 RF	93W	265/40 R19 RF	102W
205/50 R17 RFT	89W	275/40 R19 RF	105Y
215/50 R17 RF	95W	275/40 R19 RFT	101Y
225/50 R17 RF	98W	285/40 R19 RF	107W
225/50 R17 RFT	94W	245/40 R20 RF	99W
235/50 R18 RF	101W	245/40 R20 RF RFT	99Y
245/50 R18	100W	255/40 R20 RF	101W
245/50 R18 RFT	100W	245/35 R17	87W
195/45 R16 RF	84V	215/35 R18 RF	84W
205/45 R16 RF	87W	225/35 R18 RF	87W
215/45 R16 RF	90V	245/35 R18 RF	92W
205/45 R17 RF	88W	245/35 R18 RFT	88Y
215/45 R17 RF	91W	255/35 R18 RF	94Y
225/45 R17 RF	94W	255/35 R18 RFT	90Y
225/45 R17 RFT	91W	265/35 R18 RF	97W
235/45 R17 RF	97W	275/35 R18 RF	99W
245/45 R17 RF	99W	275/35 R18 RFT	95Y
215/45 R18 RF	93W	285/35 R18 RF	101W
225/45 R18 RF	95W	285/35 R18 RFT	97Y
225/45 R18 RFT	91W	295/35 R18	99Y
235/45 R18 RF	98W	215/35 R19 RF	85W
245/45 R18 RF	100W	225/35 R19 RF	88W
245/45 R18 RFT	96W	225/35 R19 RF RFT	88Y
255/45 R18 RF	103W	235/35 R19 RF	91W
275/45 R18 RF	107W	245/35 R19 RF	93W
225/45 R19 RF	96W	245/35 R19 RF RFT	93Y
235/45 R19 RF	99W	255/35 R19 RFT	92W
245/45 R19 RF	102W	255/35 R19 RF	96W
245/45 R19 RFT	98W	265/35 R19 RF	98W
255/45 R19 RF	104Y	275/35 R19 RF	100W
205/40 R16 RF	83W	275/35 R19 RFT	96W
215/40 R16 RF	86W	285/35 R19	99Y
205/40 R17 RF	84W	285/35 R19 RF RFT	99Y

295/35 R19 RF	104W
225/35 R20 RF	90Y
225/35 R20 RF RFT	90Y
245/35 R20 RF	95W
245/35 R20 RF RFT	95Y
255/35 R20 RF	97W
265/35 R20 RF	99W
275/35 R20 RF	102Y
275/35 R20 RF RFT	102Y
295/35 R20 RF	105W
245/30 R19 RF	89W
255/30 R19 RF	91W
255/30 R19 RF RFT	91Y
265/30 R19 RF	93W
275/30 R19 RF	96W
275/30 R19 RF RFT	96W
285/30 R19 RF	98W
295/30 R19 RF	100W
305/30 R19 RF	102W
245/30 R20 RF	90Y
255/30 R20 RF	92Y
255/30 R20 RF RFT	92Y
265/30 R20 RF	94Y
275/30 R20 RF	97W
275/30 R20 RF RFT	97Y
285/30 R20 RF	99W
295/30 R20 RF	101W
305/30 R20 RF	103W



ST582 Maxx Out

155/70 R13	75T
165/70 R13	79T
175/70 R13	82T
175/70 R14	84T
175/65 R14	82T
185/65 R14	86T
175/65 R15	84H
185/65 R15	88T
185/65 R15	88H
195/65 R15	91H
195/65 R15 RF	95H
205/65 R15	94H

215/65 R16 RF	102V
185/60 R14	82H
185/60 R15 RF	88H
195/60 R15	88H
205/60 R16	96V
215/60 R16 RF	99V
185/55 R14	80H
185/55 R15 RF	86H
195/55 R15	85H
195/55 R16	87H
205/55 R16	91H
205/55 R16 RF	91V
205/55 R16 RF	94V
215/55 R16 RF	97V
225/55 R16 RF	99W
205/55 R17 RF	95W
215/55 R17 RF	98W
225/55 R17 RF	101W
235/55 R17 RF	103W
195/55 R20 RF	95H
195/50 R15	82V
195/50 R16 RF	88V
205/50 R17 RF	93W
215/50 R17 RF	95W
225/50 R17 RF	98V
195/45 R16 RF	84V
215/45 R16 RF	90V
205/45 R17 RF	88W
215/45 R17 RF	91W
225/45 R17 RF	94W
235/45 R17 RF	97W
245/45 R17 RF	99Y
225/45 R18 RF	95W
225/45 R18 RF	95Y
235/45 R18 RF	98W
245/45 R18 RF	100W
225/45 R19 RF	96W
245/40 R17 RF	95Y
225/40 R18 RF	92W
235/40 R18 RF	95Y
245/40 R18 RF	97Y
235/40 R19 RF	96Y
235/35 R19 RF	91Y
245/35 R19 RF	93Y
255/35 R19 RF	96Y



W860 ArcTerrain

175/70 R13	82T
175/65 R14	82T
185/65 R14	86T
185/65 R15	88T
195/65 R15	91T
205/65 R15	94T
185/60 R15 RF	88T
195/60 R15	88T
205/60 R16	92T
205/60 R16 RF	96T
195/55 R16	87T
205/55 R16	91T
215/55 R16 RF	97T
215/55 R17 RF	98T
225/55 R17 RF	101T
215/50 R17 RF	95T
225/50 R17 RF	98T
225/45 R17 RF	94T



PolarMaxx

155/80 R13	79T
165/80 R13	83T
155/70 R13	75T
165/70 R13	79T
175/70 R13	82T
165/70 R14	81T
175/70 R14	84T
175/70 R14 RF	88T
185/70 R14	88T
155/65 R13	73T
155/65 R14	75T
165/65 R14	79T
175/65 R14	82T
175/65 R14 RF	86T
185/65 R14	86T
175/65 R15	84T
185/65 R15	88H
185/65 R15 RF	92H
195/65 R15	91H
195/65 R15 RF	95H
205/65 R15	94H
205/65 R16	95H
185/60 R14	82H
185/60 R15 RF	88H
195/60 R15	88H
205/60 R16 RF	96H
205/60 R16 RF RFT	96H
185/55 R15	82H
195/55 R15	85H
185/55 R16 RF	87H
195/55 R16	87H

205/55 R16	91H
205/55 R16 RFT	91H
195/50 R15	82H
195/50 R16 RF	88H



PolarMaxx Sport

215/65 R16 RF	102H
215/60 R16 RF	99H
235/60 R16	100H
215/55 R16 RF	97H
225/55 R16 RF	99H
205/55 R17 RF	95V
215/55 R17 RF	98V
225/55 R17 RF	101V
235/55 R17 RF	103V
205/50 R17 RF	93V
215/50 R17 RF	95V
225/50 R17 RF	98V
215/50 R18	92V
225/50 R18 RF	99V
245/50 R18 RF	104V
205/45 R17 RF	88V
215/45 R17 RF	91V
225/45 R17 RF	94V
235/45 R17 RF	97V
245/45 R17 RF	99V
215/45 R18 RF	93V
225/45 R18 RF	95V
225/45 R18 RF RFT	95V
235/45 R18 RF	98V
245/45 R18 RF	100V
235/45 R19 RF	99V
245/45 R19 RF	102V
245/40 R17 RF	95V
225/40 R18 RF	92V
235/40 R18 RF	95V
245/40 R18 RF	97V
255/40 R18 RF	99V
225/40 R19 RF	93W
225/40 R19 RF RFT	93W
245/40 R19 RF	98V
255/40 R19 RF	100V
255/40 R20 RF	101W



RF : REINFORCED
RFT: RUN FLAT

ST430 Incurro A/S

235/75 R15	105H
205/70 R15	96H
215/70 R15	98H
215/70 R16	100H
225/70 R16 RF	107T
235/70 R16	106H
245/70 R16	107H
255/70 R16	111T
265/70 R16	112T
215/65 R16	98H
215/65 R16 RF	102H
255/65 R16	109H
215/65 R17	99H
225/65 R17	102H
235/65 R17 RF	108H
245/65 R17 RF	111H
255/65 R17	110H
265/65 R17	112H
215/60 R16	95H
235/60 R16	100H
225/60 R17 RF	103H
255/60 R18 RF	112V



ST440 Incurro A/T

205/80 R16 RF	104T
235/75 R15	105T
255/70 R15	108T
265/70 R15 RF	116T
235/70 R16	106T
245/70 R16 RF	111T
215/65 R16	98T
265/65 R17 RF	116S
255/60 R18 RF	112H
265/60 R18 RF	114T



ST450 Incurro H/T

225/65 R17	102H
235/65 R17 RF	108V
215/60 R17	96V
235/60 R17	102V
255/60 R17	106V
225/60 R18	100H
235/60 R18 RF	107V
245/60 R18	105H
255/60 R18 RF	112V
265/60 R18	110H
265/60 R18	110V
225/55 R17	97V
235/55 R17 RF	103V
215/55 R18	95H
225/55 R18	98V
235/55 R18	100V
255/55 R18 RF	109V
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H
255/55 R19 RF	111V
275/55 R19	111V
255/55 R20 RF	110Y
235/50 R18 RF	101V
235/50 R19 RF	103W
255/50 R19 RF	107V
255/50 R19 RF RFT	107W
265/50 R19 RF	110W
255/50 R20 RF	109Y
275/45 R19 RF	108W
285/45 R19	107V
255/45 R20 RF	105Y
275/45 R20 RF	110W
285/45 R20 RF	112Y
275/45 R21 RF	110Y
275/40 R20	102W
275/40 R20 RF RFT	106Y
295/35 R21 RF	107Y
275/40 R22 RF	108Y



SuvMaxx A/S

215/65 R17 RF	103V
235/65 R17 RF	108W
215/60 R17 RF	100V
225/60 R18 RF	104W
235/60 R18 RF	107W
215/55 R18 RF	99V
225/55 R18 RF	102V
235/55 R18 RF	104V
235/55 R19 RF	105W
255/55 R18 RF	109W
215/50 R18	92W
235/50 R18 RF	101W
235/45 R19 RF	99W
245/45 R19 RF	102W



W870 Incurro

205/80 R16 RF	104T
235/75 R15 RF	109T
205/70 R15	96T
215/70 R15	98H
215/70 R16 RF	104H
225/70 R16 RF	107H
235/70 R16	106T
245/70 R16 RF	111T
255/70 R16	111T
265/70 R16	112T
215/65 R17	99H
225/65 R17 RF	106H
235/65 R17 RF	108V
245/65 R17 RF	111H
255/65 R17 RF	114H
265/65 R17 RF	116H
215/60 R17 RF	100H
225/60 R17 RF	103V
235/60 R17 RF	106H
255/60 R17 RF	110V
225/60 R18 RF	104V
235/60 R18 RF	107H
245/60 R18 RF	105H
255/60 R18 RF	112H
265/60 R18 RF	114H
235/55 R17 RF	103V
215/55 R18	95H
225/55 R18 RF	102H
235/55 R18 RF	104H
255/55 R18 RF	109V

255/55 R18 RF RFT	109H
205/55 R19 RF	97H
225/55 R19	99H
235/55 R19 RF	105V
245/55 R19	103H
255/55 R19 RF	111V
275/55 R19	111H
235/50 R18 RF	101V
235/50 R19 RF	103V
255/50 R19 RF	107V
255/50 R19 RF RFT	107V
245/50 R20	102V
265/50 R20 RF	111H
225/45 R19 RF	96V
285/45 R19 RF	111H
275/45 R20 RF	110V
275/40 R20 RF	106V
275/40 R20 RF RFT	106V
315/35 R20 RF	110V
315/35 R20 RF RFT	110V



W880 Incurro Ice

245/70 R16 RF	111T
215/65 R16 RF	102T
215/60 R17 RF	100T



ST850 Provan

195 R15 C	8PR	106/104R
-----------	-----	----------



ST850 Provan Plus

5.00 R 12 C	8PR	83/81P
155 R 12 C	8PR	88/86N
155 R 13 C	8PR	90/89R
185 R 14 C	8PR	102/100R
185 R 15 C	8PR	103/102R
195 R 14 C	8PR	106/104R
205 R14 C	8PR	109/107P
215 R14 C	8PR	112/110P
175/75 R 16 C	8PR	101/99R
185/75 R 16 C	8PR	104/102R
195/75 R 16 C	8PR	107/105R
205/75 R 16 C	8PR	110/108R
205/75 R 16 C	10PR	113/111R
215/75 R 16 C	8PR	113/111R
215/75 R 16 C	10PR	116/114R
225/75 R 16 C	8PR	118/116R
165/70 R 14 C	6PR	89/87R
195/70 R 15 C	8PR	104/102R
205/70 R 15 C	8PR	106/104R
215/70 R 15 C	8PR	109/107S
225/70 R 15 C	8PR	112/110R
225/70 R 15 C	10PR	116/114R
205/65 R 15 C	8PR	102/100T
205/65 R 16 C	8PR	107/105T
215/65 R 16 C	8PR	109/107R
225/65 R 16 C	8PR	112/110R
235/65 R 16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R



ST860 Provan

205/75 R 16 C	8PR	110/108R
215/75 R 16 C	8PR	113/111R
215/75 R 16 C	10PR	116/114R
225/70 R 15 C	8PR	112/110R
195/65 R 16 C	8PR	104/102T
205/65 R 16 C	8PR	107/105T
215/65 R 15 C	6PR	104/102T
215/65 R 16 C	8PR	109/107T
235/65 R 16 C	8PR	115/113R
235/65 R 16 C	12PR	121/119R
285/65 R 16 C	10PR	128N
195/60 R 16 C	6PR	99/97T



ST950 Prowin

155 R 12 C	8PR	88/86N
155 R 13 C	8PR	90/89N
185 R 14 C	8PR	102/100R
195 R 14 C	8PR	106/104R
175/75 R 16 C	8PR	101/99R
185/75 R 16 C	8PR	104/102R
195/75 R 16 C	8PR	107/105R
205/75 R 16 C	8PR	110/108R
215/75 R 16 C	8PR	113/111R
225/75 R 16 C	8PR	118/116R
195/70 R 15 C	8PR	104/102R
205/70 R 15 C	8PR	106/104R
215/70 R 15 C	8PR	109/107R
225/70 R 15 C	8PR	112/110R
205/65 R 15 C	8PR	102/100T
205/65 R 16 C	8PR	107/105T
215/65 R 16 C	8PR	109/107R
225/65 R 16 C	8PR	112/110R
235/65 R 16 C	8PR	115/113R
195/60 R 16 C	6PR	99/97T



ST960 Prowin

155 R 12 C	8PR	88/86N
155 R 13 C	8PR	90/89N
185 R 14 C	8PR	102/100R
195 R 14 C	8PR	106/104R
185/75 R 16 C	8PR	104/102R
195/75 R 16 C	8PR	107/105R
205/75 R 16 C	10PR	113/111R
215/75 R 16 C	10PR	116/114R
225/75 R 16 C	8PR	118/116R
195/70 R 15 C	8PR	104/102R
205/70 R 15 C	8PR	106/104R
215/70 R15 C	8PR	109/107R
225/70 R 15 C	8PR	112/110R
195/65 R 16 C	8PR	104/102T
205/65 R 16 C	8PR	107/105T
215/65 R 15 C	6PR	104/102T
215/65 R 16 C	8PR	109/107R
225/65 R 16 C	8PR	112/110R
235/65 R 16 C	8PR	115/113R
235/65 R 16 C	12PR	121/119R
285/65 R 16 C	10PR	128N
195/60 R 16 C	6PR	99/97T



Vanmaxx A/S

155 R12 C	88/86N
155 R13 C	90/89R
185 R14 C	102/100R
195 R14 C	106/104R
185/75 R16 C	104/102R
195/75 R16 C	107/105R
205/75 R16 C	113/111R
215/75 R16 C	116/114R
215/75 R16 C	116/114R
225/75 R16 C	118/116R
195/70 R15 C	104/102R
215/70 R15 C	109/107S
225/70 R15 C	116/114R
205/65 R16 C	107/105T
215/65 R15 C	104/102T
215/65 R16 C	109/107T
225/65 R16 C	112/110R
235/65 R16 C	121/119R
285/65 R16 C	131R
195/60 R16 C	99/97T
215/60 R17 C	109/107T



RF : REINFORCED
RFT: RUN FLAT

There are certain markings on the sidewalls of each tire. Below, you can find remarks and notices about the sidewall markings and the properties they depict:

DOT Symbol:

Proves that tyre complies with DOT regulations.

European Commission of Economics Confirmation :

It is the legitimate proof that tires comply with all ECE directives and is represented by a common confirmation number.

Max. Load and Pressure Markings:

It is a necessary marking on sidewalls of tires which complies with DOT directives. It consists of necessary information about max. load and pressure of tyres.

“European Commission of Economics” Tire Verification Symbol:

This symbol proves that the tyre complies with all necessary standards disclaimed by European Commission of Economics.

Construction Info:

It represents the ply ratings and type of material used in sidewall and base in accordance with DOT regulation.

UTQG Quality Indicator:


- A wear life index as 100 indicates that the tire life is appropriate when tested under standard conditions. Tire life may significantly depend on road or climate conditions and service properties. While 100 is a good rating, more than 100 means “very good” and below 100 means translates as a weak reputation.
- Demonstrates the ability to stop on wet asphalt or concrete surfaces under controlled conditions. Traction grades are AA, A, B and C in order of highest grades.
- Heat Resistance Indicator: Indicates a tire’s resistance to generation of heat and its ability to dissipate heat.

Temperature grades, from highest to lowest are AB, B and C.

Speed class and load index :

European ETRTO standards set the maximum load limits of a tire.

- | | |
|-----------------------------------|-----------------------------------|
| 1 – Brand Logo | 13 – Speed Index |
| 2 – Construction Information | 14 – Safety Warnings |
| 3 – Manufacturing Country | 15 – Outside |
| 4 – Max. Load and Pressure Rating | 16 – ECE approval number |
| 5 – Mold No | 17 – Max. Load Index |
| 6 – Construction Type | 18 – Tire Size |
| 7 – DOT Mark | 19 – Pattern Name |
| 8 – Factory Code | 20 – Temperature Resistance Index |
| 9 – Tubeless | 21 – Tire Road Grip Index |
| 10 – Product Code | 22 – Tire Wear Index Resistance |
| 11 – Date of Manufacture | 23 – UTOG Quality Indicator : |
| 12 – ECE approval mark | |

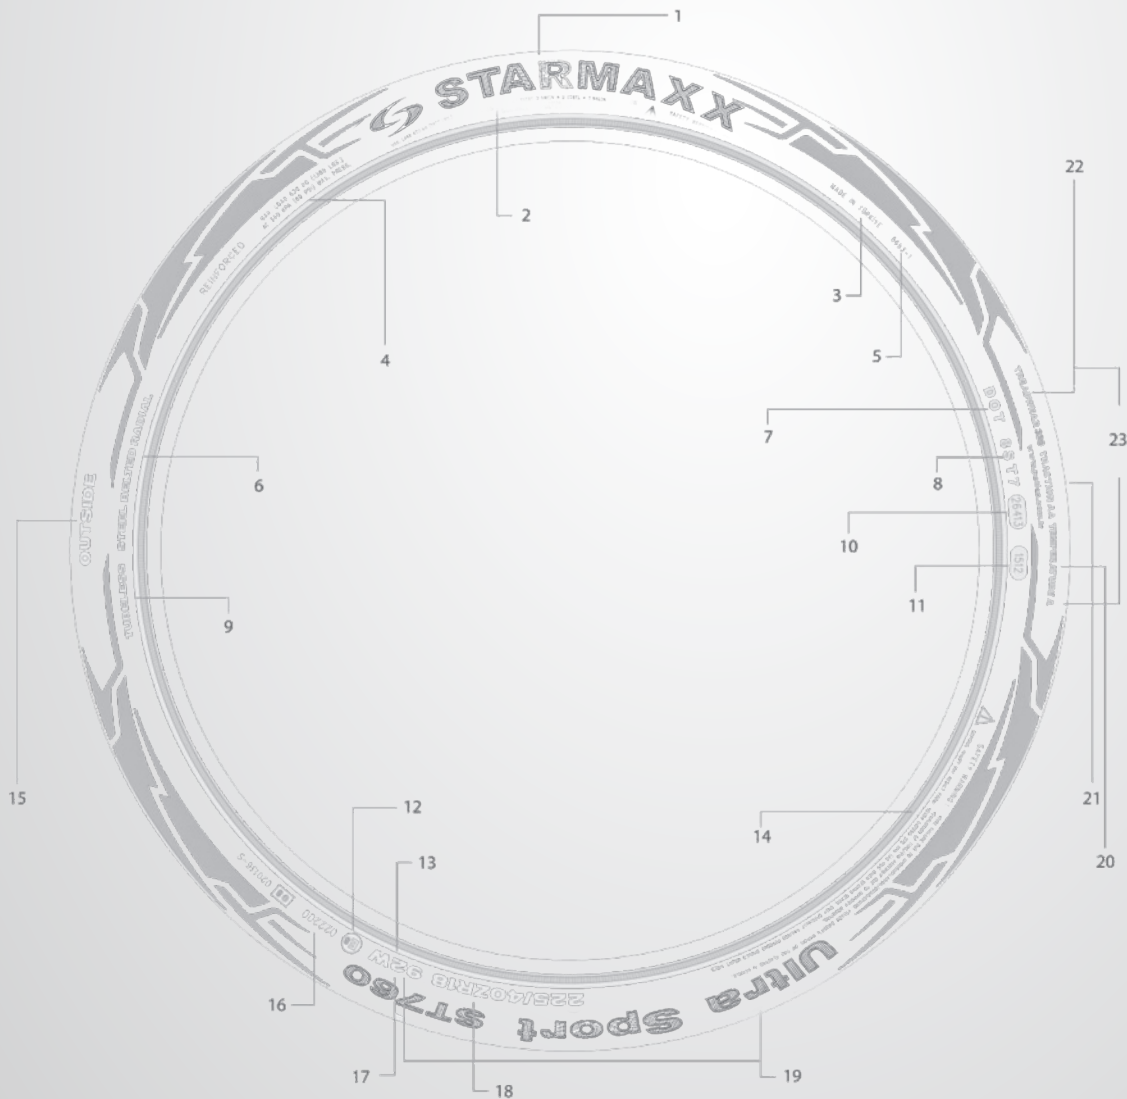

Starmaxx is behind you!
Don't be afraid to travel on
challenging roads.



starmaxx
HIGH PERFORMANCE TIRES

www.starmaxx.com

RADIAL TIRE CONSTRUCTION


IMPORTANT DEFINITIONS RELATED TO THE TIRE

The tire is generally defined with such parameters as the maximum cross-section width corresponding to the standard inflation pressure in the measurement rim, nominal diameter of the rim to be attached, speed index, load capacity index and the cross-section ratio.


EXAMPLE :


Tire size 225 / 40ZR18 92W

- Cross – section width 225 mm (Max. distance between side-walls of an inflated tire)
- Series – the cross-section height to crosssection width (%55)
- Radial body structure (R)
- Symbol of rim diameter (inch) (18)
- Load index (92)
- Speed symbol (W)
- Serial no ; each producer's coding consisting of the production data
- Abrasion indicator (TWI) OR
- Usable in a tubeless way or with the tubetype usage
- Northern America Department of Transportation compliance symbol (DOT)
- European Community Compliance symbol and registry no (E)
- Arrow for direction of rotation, inside/outside

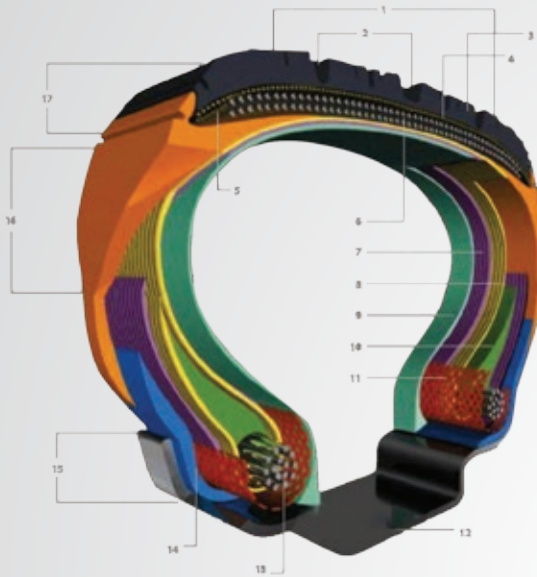

1. Tread
2. Water Channeling
3. Blocks
4. Nylon Impact Layer
5. Reinforcement Layer
6. Steel Cords
7. First Carcass Layer
8. Second Carcass Layer
9. Innerliner
10. Bead Filling
11. Bead Reinforcement fabric
12. Rim
13. Bead Wire
14. Rim Cushion
15. Rim Flange
16. Sidewall
17. Shoulder

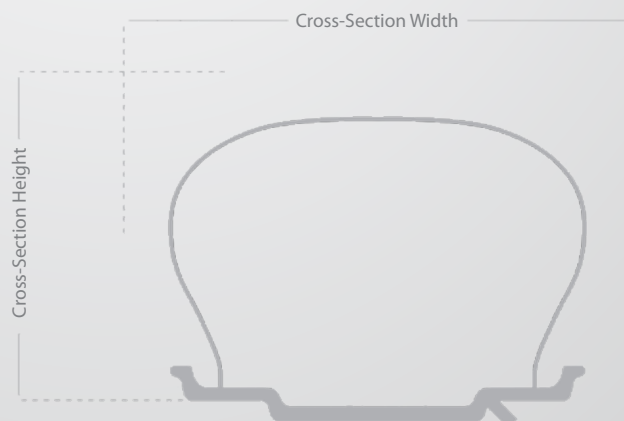

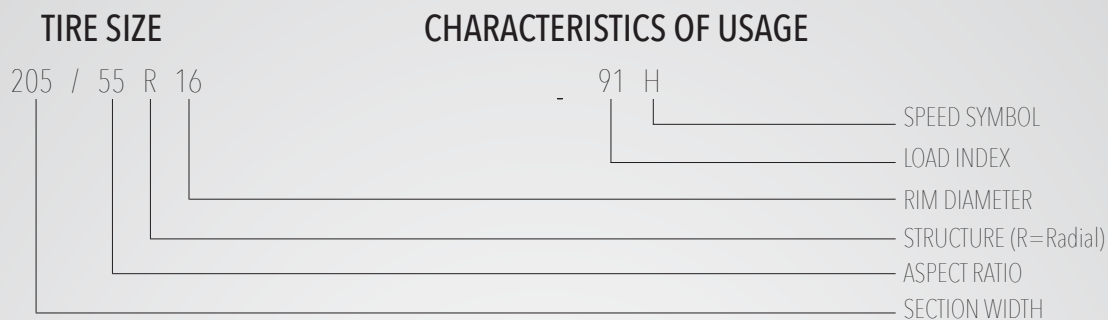

Speed Symbol Table

It is the alphabetical code of the velocity which the tire can perform.

Speed Symbol	Speed Limit (km/s)	Speed Symbol	Speed Limit (km/s)	Speed Symbol	Speed Limit (km/s)
A1	5	D	65	Q	160
A2	10	E	70	R	170
A3	15	F	80	S	180
A4	20	G	90	T	190
A5	25	J	100	U	200
A6	30	K	110	H	210
A7	35	L	120	V	240
A8	40	M	130	W	270
B	50	N	140	Y	300
C	60	P	150	ZR	270 km+

Load Index Table

The load index is a symbol which shows the maximum load capacity of the vehicle per tire.

A	B	A	B	A	B	A	B	A	B	A	B
60	250	96	710	132	2000	168	5600	204	16000	240	45000
61	257	97	730	133	2060	169	5800	205	16500	241	46250
62	265	98	750	134	2120	170	6000	206	17000	242	47500
63	272	99	775	135	2180	171	6150	207	17500	243	48750
64	280	100	800	136	2240	172	6300	208	18000	244	50000
65	290	101	825	137	2300	173	6500	209	18500	245	51500
66	300	102	850	138	2360	174	6700	210	19000	246	53000
67	307	103	875	139	2430	175	6900	211	19500	247	54500
68	315	104	900	140	2500	176	7100	212	20000	248	56000
69	325	105	925	141	2575	177	7300	213	20600	249	58000
70	335	106	950	142	2650	178	7500	214	21200	250	60000
71	345	107	975	143	2725	179	7750	215	21800	251	61500
72	355	108	1000	144	2800	180	8000	216	22400	252	63000
73	365	109	1030	145	2900	181	8250	217	23000	253	65000
74	375	110	1060	146	3000	182	8500	218	23600	254	67000
75	387	111	1090	147	3075	183	8750	219	24300	255	69000
76	400	112	1120	148	3150	184	9000	220	25000	256	71000
77	412	113	1150	149	3250	185	9250	221	25750	257	73000
78	425	114	1180	150	3350	186	9500	222	26500	258	75000
79	437	115	1215	151	3450	187	9750	223	27250	259	77500
80	450	116	1250	152	3550	188	10000	224	28000	260	80000
81	462	117	1285	153	3650	189	10300	225	29000	261	82500
82	475	118	1320	154	3750	190	10600	226	30000	262	85000
83	487	119	1360	155	3875	191	10900	227	30750	263	87500
84	500	120	1400	156	4000	192	11200	228	31500	264	90000
85	515	121	1450	157	4125	193	11500	229	32500	265	92500
86	530	122	1500	158	4250	194	11800	230	33500	266	95000
87	545	123	1550	159	4375	195	12150	231	34500	267	97500
88	560	124	1600	160	4500	196	12500	232	35500	268	100000
89	580	125	1650	161	4625	197	12850	233	36500	269	103000
90	600	126	1700	162	4750	198	13200	234	37500	270	106000
91	615	127	1750	163	4875	199	13600	235	38750	271	109000
92	630	128	1800	164	5000	200	14000	236	40000	272	112000
93	650	129	1850	165	5150	201	14500	237	41250	273	115000
94	670	130	1900	166	5300	202	15000	238	42500	274	118000
95	690	131	1950	167	5450	203	15500	239	43750	275	121500

- (A) Load Index
 (B) The weight a tyre can carry (kg)





ST330



ST532



ST542



ST760





PASSENGER CAR TIRES

ST582



SUMMER WINTER



W860



WINTER M+S



PolarMaxx



WINTER M+S



PolarMaxx Sport



WINTER M+S



ST330 Tolero

Developed for performance and handling for the general use segment. Offers traction and riding comfort combined with durability.



PERFORMANCE AND HANDLING ON ANY ROAD

■ PATTERN PROPERTIES



- Circumferential rib on the tread center improves handling and braking performance



- Stiff shoulder blocks enable exceptional cornering performance at high speeds, and provide resistance against irregular wear.



- Computer simulated block array minimizes road / pattern noise, and enhances driving comfort.



- Depending on the size of the tire, three or four different grooves provide excellent water drainage and reduce the risk of aquaplaning significantly.





■ ALL SIZES

ST330 Tolero

155/80 R12	77T	145/70 R13	71T	185/70 R14	88T ●●	185/65 R14	86T ●●
155/80 R13	79T	155/70 R13	75T	195/70 R14	91T ●●	195/65 R14	89H ●●
165/80 R13	83T	165/70 R13	79T	195/70 R15 RF	97T ●●	175/65 R15	84T
165/80 R13 RF	87R	165/70 R13 RF	83T	155/65 R13	73T	185/65 R15	88T ●●
175/80 R14	88T	175/70 R13	82T	165/65 R13	77T	195/65 R15	91T ●●
165/80 R15	87T	185/70 R13	86T ●●	175/65 R13	80T	195/65 R15 RF	95T ●●
145/70 R12	69T	165/70 R14	81T	155/65 R14	75T	165/60 R14	75T
155/70 R12	73T	165/70 R14 RF	85R	165/65 R14	79T		
165/70 R12	77T	175/70 R14	84T	175/65 R14	82T		
175/70 R12	80T	175/70 R14 RF	88T	175/65 R14 RF	86T		

RF : REINFORCED

●● : Sizes with two rib design



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Patial silica tread compound developed through FST technology provides high handling performance on dry and wet road conditions.

High Tech
Cap Ply Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear while
improving uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral stability at high
speed cornering.



ST532 Novaro

Designed and produced with latest technology. It offers good mileage and excellent braking performance in both wet and dry conditions.



GRIP THE ROAD SAFELY

■ PATTERN PROPERTIES



■ Circumferential plain block attached to the shoulder provides excellent handling and braking performance on dry and wet roads.



■ Asymmetric tread pattern enables exceptional performance.



■ Stiff shoulder blocks provide exceptional cornering performance at high speeds and ensure resistance against irregular wear.



■ Computer simulated block array with inner and outer lateral channels minimizes road / pattern noise and enhances driving comfort.



■ Four different grooves provide excellent water drainage, reducing the risk of aquaplaning significantly.





ALL SIZES

175/70 R13	82H	195/65 R15	91H	175/60 R13	77H	205/60 R16	92H
175/70 R14	84H	195/65 R15	91V	185/60 R14	82H	205/60 R16	92V
175/70 R14 RF	88H	195/65 R15 RF	95H	195/60 R14	86H	205/60 R16 RF	96V
185/70 R14	88H	205/65 R15	94H	185/60 R15	84H	185/55 R15	82V
175/65 R14	82H	205/65 R15 RF	99H	185/60 R15 RF	88H	205/55 R15	88V
175/65 R14 RF	86T	205/65 R15	94V	195/60 R15	88H	195/55 R16	87V
175/65 R15	84H	215/65 R15	96V	195/60 R15	88V	205/55 R16	91H
185/65 R14	86H	205/65 R16	95H	205/60 R14	88V	205/55 R16	91V
185/65 R15	88H	215/65 R16	98H	205/60 R15	91H	215/55 R16	93V
185/65 R15 RF	92H	215/65 R16	98V	205/60 R15	91V	205/50 R15	86W [Ⓡ]

ST532 Novaro

RF : REINFORCED
Ⓡ : RIM PROTECTOR



TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Silica tread compound developed through FST technology provides superb handling performance on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.
High Tech Cap Ply Construction	Jointless "0" degree spiral nylon cover and wide steel belts	High driving safety, comfort and durability.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



ST542 Naturen

Designed to be more fuel efficient with high mileage performance. Guarantees safety, durability and low rolling resistance.



ECO-FRIENDLY FUEL SAVING PERFORMANCE

■ PATTERN PROPERTIES



■ High performance on both dry and wet surfaces with asymmetrical pattern.



■ Footprint with optimized sipe/groove density ensures good rolling resistance while securing safety.



■ Computer designed block array minimises road / pattern noise and provides high driving comfort.



■ Fast and effective water discharge with three circular channels.





■ ALL SIZES

175/70 R14	84T	195/65 R15	91V	215/60 R16	95V
175/70 R14 RF	88T	205/65 R15	94H	185/55 R14	80H (RP)
185/70 R14	88T	185/60 R14	82H	185/55 R15	82V (RP)
175/65 R14	82T	185/60 R15	84H	195/55 R15	85H (RP)
185/65 R14	86T	185/60 R15 RF	88H	195/55 R16	87H (RP)
185/65 R15	88T	195/60 R15	88H	205/55 R16	91H (RP)
185/65 R15	88H	205/60 R16	92H	195/50 R15	82H (RP)
195/65 R15	91H	205/60 R16	92V	195/50 R16 RF	88V (RP)
195/65 R15 RF	95T	205/60 R16 RF	96V		

RF : REINFORCED
 (RP) : RIM PROTECTOR

ST542 Naturen



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



ST760 Ultra Sport

Produced for drivers who desire ultimate handling and grip performance without compromising comfort while driving at high speeds.



FOR THE ONES, HAVING DESIRE FOR SPEED PERFORMANCE AND COMFORT

■ PATTERN PROPERTIES



■ Center block contacts the surface and provides a stable and balanced drive.



■ High performance on both dry and wet surfaces with asymmetrical pattern.



■ Reinforced and wide shoulder block increases the surface amount contacting the road and enhances dry grip performance with high curving capability and maneuverability. Provides resistances against asymmetrical wear.



■ Intensely designed outer side provides better grip on dry and wet roads and increases the stability of the vehicle thanks to its special canal structure.



■ Minimised road / pattern noise enhances driving comfort with computer designed block array.



■ Fast and effective water discharge with three circular channels.



Specially designed tread profile enables outstanding high-speed capabilities, superb handling and cornering response on dry and wet road conditions. Modern tread design and special tread compound provide fuel efficiency with exceptional durability. ST760 is developed for a wide range of vehicles from sport cars to luxury cars.

*SEE NEXT PAGE FOR ALL SIZES



TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.
High Tech Cap Ply Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



ST760 Ultra Sport



■ ALL SIZES

ST760 Ultra Sport



215/60 R16 RF	99V	215/40 R16 RF	86W	Ⓡ	275/35 R19 RF	100W	Ⓡ ••
225/60 R16	98V	205/40 R17 RF	84W	Ⓡ	275/35 R19 RFT	96W	••
235/60 R16	100W	215/40 R17 RF	87W	Ⓡ	285/35 R19	99Y	••
195/55 R15	85V	235/40 R17 RF	94W	Ⓡ	285/35 R19 RF RFT	99Y	Ⓡ ••
185/55 R16 RF	87H	245/40 R17 RF	95W	Ⓡ	295/35 R19 RF	104W	Ⓡ ••
195/55 R16	87V	215/40 R18 RF	89W	Ⓡ	225/35 R20 RF	90Y	Ⓡ
195/55 R16 RFT	87V	215/40 R18 RF RFT	85Y		225/35 R20 RF RFT	90Y	
205/55 R16 RFT	91V	225/40 R18 RF	92Y	Ⓡ	245/35 R20 RF	95W	Ⓡ
205/55 R16 RF	94W	225/40 R18 RF RFT	92Y	Ⓡ	245/35 R20 RF RFT	95Y	
215/55 R16 RF	97W	235/40 R18 RF	95W	Ⓡ	255/35 R20 RF	97W	Ⓡ ••
225/55 R16 RF	99W	245/40 R18 RF	97W	Ⓡ	265/35 R20 RF	99W	Ⓡ ••
205/55 R17 RF	95W	245/40 R18 RFT	93W		275/35 R20 RF	102Y	Ⓡ ••
215/55 R17 RF	98W	255/40 R18	95W	••	275/35 R20 RF RFT	102Y	Ⓡ ••
225/55 R17 RF	101W	255/40 R18 RFT	95Y	••	295/35 R20 RF	105W	Ⓡ ••
225/55 R17 RFT	97W	265/40 R18 RF	101Y	Ⓡ ••	245/30 R19 RF	89W	Ⓡ
235/55 R17 RF	103W	275/40 R18 RF	103Y	Ⓡ ••	255/30 R19 RF	91W	Ⓡ ••
235/55 R18 RF	104W	275/40 R18 RF RFT	99Y	••	255/30 R19 RF RFT	91Y	••
195/50 R15	82V	225/40 R19 RF	93W	Ⓡ	265/30 R19 RF	93W	Ⓡ ••
195/50 R16	84V	225/40 R19 RF RFT	93Y	Ⓡ	275/30 R19 RF	96W	Ⓡ ••
205/50 R16 RF	91W	235/40 R19 RF	96Y	Ⓡ	275/30 R19 RF RFT	96W	••
225/50 R16 RF	96W	245/40 R19 RF	98W	Ⓡ	285/30 R19 RF	98W	Ⓡ ••
205/50 R17 RF	93W	245/40 R19 RFT	94W		295/30 R19 RF	100W	Ⓡ ••
205/50 R17 RFT	89W	255/40 R19 RF	100W	Ⓡ ••	305/30 R19 RF	102W	Ⓡ ••
215/50 R17 RF	95W	265/40 R19 RF	102W	Ⓡ ••	245/30 R20 RF	90Y	Ⓡ
225/50 R17 RF	98W	275/40 R19 RF	105Y	Ⓡ ••	255/30 R20 RF	92Y	Ⓡ ••
225/50 R17 RFT	94W	275/40 R19 RFT	101Y	••	255/30 R20 RF RFT	92Y	••
235/50 R18 RF	101W	285/40 R19 RF	107W	Ⓡ ••	265/30 R20 RF	94Y	Ⓡ ••
245/50 R18	100W	245/40 R20 RF	99W	Ⓡ	275/30 R20 RF	97W	Ⓡ ••
245/50 R18 RFT	100W	245/40 R20 RF RFT	99Y		275/30 R20 RF RFT	97Y	••
195/45 R16 RF	84W	255/40 R20 RF	101W	Ⓡ ••	285/30 R20 RF	99W	Ⓡ ••
205/45 R16 RF	87W	245/35 R17	87W		295/30 R20 RF	101W	Ⓡ ••
215/45 R16 RF	90V	215/35 R18 RF	84W	Ⓡ	305/30 R20 RF	103W	Ⓡ
205/45 R17 RF	88W	225/35 R18 RF	87W	Ⓡ			
215/45 R17 RF	91W	245/35 R18 RF	92W	Ⓡ			
225/45 R17 RF	94W	245/35 R18 RFT	88Y				
225/45 R17 RFT	91W	255/35 R18 RF	94Y	Ⓡ ••			
235/45 R17 RF	97W	255/35 R18 RFT	90Y	••			
245/45 R17 RF	99W	265/35 R18 RF	97W	Ⓡ ••			
215/45 R18 RF	93W	275/35 R18 RF	99W	Ⓡ ••			
225/45 R18 RF	95W	275/35 R18 RFT	95Y	••			
225/45 R18 RFT	91W	285/35 R18 RF	101W	Ⓡ ••			
235/45 R18 RF	98W	285/35 R18 RFT	97Y	••			
245/45 R18 RF	100W	295/35 R18	99Y	••			
245/45 R18 RFT	96W	215/35 R19 RF	85W	Ⓡ			
255/45 R18 RF	103W	225/35 R19 RF	88W	Ⓡ			
275/45 R18 RF	107W	225/35 R19 RF RFT	88Y				
225/45 R19 RF	96W	235/35 R19 RF	91W	Ⓡ			
235/45 R19 RF	99W	245/35 R19 RF	93W	Ⓡ			
245/45 R19 RF	102W	245/35 R19 RF RFT	93Y	Ⓡ			
245/45 R19 RFT	98W	255/35 R19 RFT	92W	••			
255/45 R19 RF	104Y	255/35 R19 RF	96W	Ⓡ ••			
205/40 R16 RF	83W	265/35 R19 RF	98W	Ⓡ ••			

RF : REINFORCED

RFT : RUN FLAT

Ⓡ : RIM PROTECTOR

•• : Sizes with two rib design

All Weather Tire

ST582 Maxxout



All weather tire for a wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire prove better grip and braking on snowy roads.

ULTIMATE PERFORMANCE ON ALL WEATHER CONDITIONS

■ PATTERN PROPERTIES



■ Better grip and traction on dry, wet and snowy roads with optimized sipe density.



■ It offers superior traction and cornering safety on snowy roads thanks to its V shaped special tread pattern design.



■ Low void ratio on tread center provides driving comfort on dry road.



■ V shaped grooves with optimized width and angle provide excellent water and snow drainage.



ALL SIZES

155/70 R13	75T	205/65 R15	94H
165/70 R13	79T	215/65 R16 RF	102V
175/70 R13	82T	185/60 R14	82H
175/70 R14	84T ^(RP)	185/60 R15 RF	88H
175/65 R14	82T	195/60 R15	88H
185/65 R14	86T	205/60 R16	96V
175/65 R15	84H	215/60 R16 RF	99V
185/65 R15	88T	185/55 R14	80H
185/65 R15	88H	185/55 R15 RF	86H
195/65 R15	91H	195/55 R15	85H
195/65 R15 RF	95H	195/55 R16	87H

205/55 R16	91H	205/55 R16 RF	94V
205/55 R16	91V	215/55 R16 RF	97V
205/55 R16 RF	94V	225/55 R16 RF	99W ^(RP)
215/55 R16 RF	97V	205/55 R17 RF	95W
225/55 R16 RF	99W ^(RP)	215/55 R17 RF	98W
205/55 R17 RF	95W	225/55 R17 RF	101W ^(RP)
215/55 R17 RF	98W	235/55 R17 RF	103W ^(RP)
225/55 R17 RF	101W ^(RP)	195/55 R20 RF	95H
235/55 R17 RF	103W ^(RP)	195/50 R15	82V ^(RP)

195/50 R16 RF	88V ^(RP)	225/50 R17 RF	98V ^(RP)
205/50 R17 RF	93W ^(RP)	215/50 R17 RF	95W ^(RP)
215/50 R17 RF	95W ^(RP)	225/50 R17 RF	98V ^(RP)
225/50 R17 RF	98V ^(RP)	195/45 R16 RF	84V ^(RP)
195/45 R16 RF	84V ^(RP)	215/45 R16 RF	90V ^(RP)
215/45 R16 RF	90V ^(RP)	205/45 R17 RF	88W ^(RP)
205/45 R17 RF	88W ^(RP)	215/45 R17 RF	91W ^(RP)
215/45 R17 RF	91W ^(RP)	225/45 R17 RF	94W ^(RP)
225/45 R17 RF	94W ^(RP)	235/45 R17 RF	97W ^(RP)
235/45 R17 RF	97W ^(RP)	245/45 R17 RF	99Y ^(RP)
245/45 R17 RF	99Y ^(RP)	225/45 R18 RF	95W ^(RP)

ST582 Maxxout

225/45 R18 RF	95Y ^(RP)
235/45 R18 RF	98W ^(RP)
245/45 R18 RF	100W ^(RP)
225/45 R19 RF	96W ^(RP)
245/40 R17 RF	95Y ^(RP)
225/40 R18 RF	92W ^(RP)
235/40 R18 RF	95Y ^(RP)
245/40 R18 RF	97Y
235/40 R19 RF	96Y ^(RP)
235/35 R19 RF	91Y ^(RP)
245/35 R19 RF	93Y ^(RP)
255/35 R19 RF	96Y ^(RP)

RF: REINFORCED
^(RP): RIM PROTECTOR



TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear while improving
uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral
stability at high speed cornering.



Winter Tire

W860 ArcTerrain

W860 ArcTerrain is specifically developed to help drivers keep moving in the harshest winter conditions where the roads are covered with snow and ice. Ensures ultimate safety by providing precise handling and short braking distance on snowy and icy road surfaces. Optimized profile keeps contact with the ground at even the most extreme conditions. The superior performance of W860 is proven on relentless tests in the challenging weather and road conditions of Finland.



MORE THAN MEETS THE ICE

■ PATTERN PROPERTIES



■ Circumferential center rib ensures continuous contact with the road surface to provide precise steering and a balanced drive.



■ Directional block structure takes performance to outstanding levels.



■ V-shaped grooves effectively discharge snow and melting water to ensure maximum braking safety.



■ Wavy sipes of optimized density transfer full braking power to the road, minimizing braking distance on frost-covered and icy roads.



■ Multi-level block sides bite the road with their teeth to guarantee persistent lateral grip for perfection in high speed bend turns.



■ Multi-faceted groove bases maximize traction and grip during acceleration and brakes by grabbing the surface like claws.



ALL SIZES

175/70 R13	82T	205/60 R16 RF	96T
175/65 R14	82T	195/55 R16	87T
185/65 R14	86T	205/55 R16	91T
185/65 R15	88T	215/55 R16 RF	97T
195/65 R15	91T	215/55 R17 RF	98T
205/65 R15	94T	225/55 R17 RF	101T
185/60 R15 RF	88T	215/50 R17 RF	95T
195/60 R15	88T	225/50 R17 RF	98T
205/60 R16	92T	225/45 R17 RF	94T

W860 ArcTerrain



TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



Winter Tire

PolarMaxx

Polarmaxx is a winter tyre developed to provide short braking distances. With its superior traction performance, it ensures safety on snowy surfaces at low temperatures.



SUPERIOR HANDLING WITH HIGH SNOW PERFORMANCE

■ PATTERN PROPERTIES



- It offers reduced noise and increased traction performance with angled blocks placed away from each other.



- The sipes adjusted perpendicular to the direction of rotation provide superior traction and short braking distance on snowy ground.



- The width and angle of the optimized V grooves and circumferential grooves allow the tire to sink into the snow easily. In this way, it offers the traction needed. They also evacuate snow easily, when tread of tire comes out of the snow.



ALL SIZES

155/80 R13	79T	185/70 R14	88T	185/65 R15	88H	195/60 R15	88H
165/80 R13	83T	155/65 R13	73T	185/65 R15 RF	92H	205/60 R16 RF	96H
155/70 R13	75T	155/65 R14	75T	195/65 R15	91H	205/60 R16 RF RFT	96H
165/70 R13	79T	165/65 R14	79T	195/65 R15 RF	95H	185/55 R15	82H
175/70 R13	82T	175/65 R14	82T	205/65 R15	94H	195/55 R15	85H
165/70 R14	81T	175/65 R14 RF	86T	205/65 R16	95H	185/55 R16 RF	87H ^(RP)
175/70 R14	84T	185/65 R14	86T	185/60 R14	82H	195/55 R16	87H
175/70 R14 RF	88T	175/65 R15	84T	185/60 R15 RF	88H	205/55 R16	91H
						205/55 R16 RFT	91H
						195/50 R15	82H
						195/50 R16 RF	88H ^(RP)

PolarMaxx



RF : REINFORCED
RFT : RUN FLAT
^(RP) : RIM PROTECTOR

TECHNOLOGY & BENEFITS

Compound Technology
 Special For Winter Conditions

The tread compound does not lose its flexibility at low temperatures. Provides superior grip. It shows high performance on snowy ground.

Approved Winter Tire

It has proven its superior performance in winter conditions by successfully completing the tough tests.

Tread Profile

With its optimized tread profile, the tire sinks into the snow and maintains its contact with the ground. It offers safety when braking and traction. It also reduces tire noise.



Winter Tire

PolarMaxx Sport

PolarMaxx Sport is a high performance winter tire developed to offer short braking distances and superior handling on snowy roads and a comfortable ride on dry roads.



SUPERIOR WET GRIP PERFORMANCE

■ PATTERN PROPERTIES



- Thanks to its special asymmetric tread pattern, it offers optimized performance in winter and in different road conditions.



- It offers superior cornering safety and wear resistance in turns, thanks to its wide and outer side shoulder blocks which are reinforced by a tie-bar.



- 3 circumferential channels provide superior snow and water evacuation at high speeds.



ALL SIZES

215/65 R16 RF 102H	235/55 R17 RF 103V ^{RP}	215/45 R17 RF 91V ^{RP}	235/45 R18 RF 98V ^{RP}	255/40 R18 RF 99V ^{RP}
215/60 R16 RF 99H	205/50 R17 RF 93V ^{RP}	225/45 R17 RF 94V ^{RP}	245/45 R18 RF 100V ^{RP}	225/40 R19 RF 93W ^{RP}
235/60 R16 100H ^{RP}	215/50 R17 RF 95V ^{RP}	225/45 R17 RF RFT 94V ^{RP}	235/45 R19 RF 99V ^{RP}	225/40 R19 RF RFT 93W ^{RP}
215/55 R16 RF 97H	225/50 R17 RF 98V ^{RP}	235/45 R17 RF 97V ^{RP}	245/45 R19 RF 102V ^{RP}	245/40 R19 RF 98V ^{RP}
225/55 R16 RF 99H ^{RP}	215/50 R18 92V ^{RP}	245/45 R17 RF 99V ^{RP}	245/40 R17 RF 95V ^{RP}	255/40 R19 RF 100V ^{RP}
205/55 R17 RF 95V	225/50 R18 RF 99V ^{RP}	215/45 R18 RF 93V ^{RP}	225/40 R18 RF 92V ^{RP}	255/40 R20 RF 101W ^{RP}
215/55 R17 RF 98V ^{RP}	245/50 R18 RF 104V ^{RP}	225/45 R18 RF 95V ^{RP}	235/40 R18 RF 95V ^{RP}	
225/55 R17 RF 101V ^{RP}	205/45 R17 RF 88V ^{RP}	225/45 R18 RF RFT 95V ^{RP}	245/40 R18 RF 97V ^{RP}	

PolarMaxx Sport

RF : REINFORCED
RFT : RUN FLAT
^{RP} : RIM PROTECTOR



TECHNOLOGY & BENEFITS

Compound Technology
 Special For Winter Conditions

The tread compound does not lose its flexibility at low temperatures. Provides superior handling. It shows high performance on snowy ground.

Approved Winter Tire

It has proven its superior performance in winter conditions by successfully completing the tough tests.

Tread Profile

With its optimized tread profile, the tire sinks into the snow and maintains its contact with the ground. It offers safety when braking and traction. It also reduces tire noise.





ST430 A/S



ST440 A/T



ST450 H/T



SuvMaxx



W870





SUV, 4X4 TIRES

W880



*Best Quality
Suv, 4x4 Tires*

All Weather Tire

ST430 A/S Incurro

High performance 4x4-SUV tire offering reliable performance throughout the year. Shows great traction performance on any kind of surface with its special compound mixture. Offers superb comfort by reducing the levels of noise and vibration.



UNIQUE FOUR SEASON PERFORMANCE

■ PATTERN PROPERTIES



■ The structure of the shoulder is specifically designed for high cornering performance and makes the tire suitable to be used in all seasons.



■ 4 circumferential channels provide rapid and effective water discharge.



■ Stylish asymmetrical pattern design creates an impressive appearance.



■ Minimised road / pattern noise enhances driving comfort with computer designed block array.





■ ALL SIZES

235/75 R15	105H	265/70 R16	112T	255/65 R17	110H
205/70 R15	96H	215/65 R16	98H	265/65 R17	112H
215/70 R15	98H	215/65 R16 RF	102H	215/60 R16	95H
215/70 R16	100H	255/65 R16	109H	235/60 R16	100H
225/70 R16 RF	107T	215/65 R17	99H	225/60 R17 RF	103H
235/70 R16	106H	225/65 R17	102H	255/60 R18 RF	112V
245/70 R16	107H	235/65 R17 RF	108H		
255/70 R16	111T	245/65 R17 RF	111H		

RF: REINFORCED

ST430 A/S Incurro



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear while improving
uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral stability
at high speed cornering.



ST440 A/T Incurro

Developed to meet the demands of high performance SUV and 4x4 vehicles. Reliable and long lasting all terrain tire that improves braking performance thanks to its special compound.



UNIQUE TRACTION ON ANY ROAD

■ PATTERN PROPERTIES



■ Stability on stream driving routes with circular block on the center.



■ Ultimate traction and balanced drive with reinforced block structure.



■ High grip on wet surface.



■ Special shoulder design delivers better traction on sand or mud.



ALL SIZES

205/80 R16 RF	104T ^{RP}	265/65 R17 RF	116S ^{RP}
235/75 R15	105T ^{RP}	255/60 R18 RF	112H ^{RP}
255/70 R15	108T ^{RP}	265/60 R18 RF	114T ^{RP}
265/70 R15 RF	116T ^{RP}		
235/70 R16	106T ^{RP}		
245/70 R16 RF	111T ^{RP}		
215/65 R16	98T ^{RP}		

RF : REINFORCED
^{RP} : RIM PROTECTOR

ST440 A/T Incurro



TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



ST450 H/T Incurro

Summer tire developed for luxury SUVs. It combines quality and high performance with its specially developed tread design and compound. Block array maximizes grip performance in every driving condition. Offers short braking distance on wet roads.



PREMIUM HIGH PERFORMANCE TIRE WITH EXCEPTIONAL COMFORT

■ PATTERN PROPERTIES



- Center block contacts the surface and provides a stable and balanced drive.



- High performance on both dry and wet surfaces with asymmetrical pattern.



- Reinforced and wide shoulder block increases the surface amount contacting the road and enhances dry grip performance with high curving capability and maneuverability.



- Intensely designed outer side provides better grip on dry and wet surfaces and increases the stability of the vehicle thanks to its special canal structure.



- Minimised road / pattern noise enhances driving comfort with computer designed block array.



- Fast and effective water discharge with three circular channels.



■ ALL SIZES

225/65 R17	102H ^(RP)	265/60 R18	110H ^{(RP) ●●}	235/55 R19 RF	105V ^(RP)	275/45 R19 RF	108W ^{(RP) ●●}
235/65 R17 RF	108V	265/60 R18	110V ^{(RP) ●●}	245/55 R19	103H ^(RP)	285/45 R19	107V ^{(RP) ●●}
215/60 R17	96V ^(RP)	225/55 R17	97V ^(RP)	255/55 R19 RF	111V ^{(RP) ●●}	255/45 R20 RF	105Y ^{(RP) ●●}
235/60 R17	102V ^(RP)	235/55 R17 RF	103V ^(RP)	275/55 R19	111V ^{(RP) ●●}	275/45 R20 RF	110W ^{(RP) ●●}
255/60 R17	106V ^{(RP) ●●}	215/55 R18	95H ^(RP)	255/55 R20 RF	110Y ^{(RP) ●●}	285/45 R20 RF	112Y ^{(RP) ●●}
225/60 R18	100H ^(RP)	225/55 R18	98V ^(RP)	235/50 R18 RF	101V ^(RP)	275/45 R21 RF	110Y ^{(RP) ●●}
235/60 R18 RF	107V ^(RP)	235/55 R18	100V ^(RP)	235/50 R19 RF	103W ^(RP)	275/40 R20	102W ^{(RP) ●●}
245/60 R18	105H ^(RP)	255/55 R18 RF	109V ^{(RP) ●●}	255/50 R19 RF	107V ^{(RP) ●●}	275/40 R20 RF RFT	106Y ^{(RP) ●●}
255/60 R18 RF	112V ^{(RP) ●●}	225/55 R19	99H ^(RP)	255/50 R19 RF RFT	107W ^{(RP) ●●}	295/35 R21 RF	107Y ^{(RP) ●●}
				265/50 R19 RF	110W ^{(RP) ●●}	275/40 R22 RF	108Y ^{(RP) ●●}
				255/50 R20 RF	109Y ^{(RP) ●●}		

ST450 H/T Incurro



- RF : REINFORCED
- RFT** : RUN FLAT
- ^(RP) : RIM PROTECTOR
- : Sizes with two rib design

■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound developed through FST technology provides superb handling on dry and wet road conditions while reducing rolling resistance significantly, which in turn, leads to less fuel consumption.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



All Weather Tire

SuvMaxx A/S

All weather tire for a wide range of weather and road conditions. The V-shaped channels offer effective discharge of water, mud and snow. Delivers excellent driving and cornering capabilities and assures safety on both ice and snow thanks to its unique pattern design and special compound. 3PMSF and M+S markings on the tire prove better grip and braking on snowy roads.



ULTIMATE PERFORMANCE ON ALL WEATHER CONDITIONS

■ PATTERN PROPERTIES



- Better grip and traction on dry, wet and snowy roads with optimized sipe density.



- Low void ratio on tread center provides driving comfort on dry road.



- It offers superior traction and cornering safety on snowy roads thanks to its V shaped special tread pattern design.



- V shaped grooves with optimized width and angle provide excellent water and snow drainage.



■ ALL SIZES

215/65 R17 RF	103V	ⓇⓅ	235/55 R19 RF	105W	ⓇⓅ
235/65 R17 RF	108W	ⓇⓅ	255/55 R18 RF	109W	ⓇⓅ
215/60 R17 RF	100V	ⓇⓅ	215/50 R18	92W	ⓇⓅ
225/60 R18 RF	104W	ⓇⓅ	235/50 R18 RF	101W	ⓇⓅ
235/60 R18 RF	107W	ⓇⓅ	235/45 R19 RF	99W	ⓇⓅ
215/55 R18 RF	99V	ⓇⓅ	245/45 R19 RF	102W	ⓇⓅ
225/55 R18 RF	102V	ⓇⓅ			
235/55 R18 RF	104V	ⓇⓅ			

RF : REINFORCED
 ⓇⓅ : RIM PROTECTOR

SuvMaxx A/S



■ TECHNOLOGY & BENEFITS

Innovative Tread Mixture

Thanks to the tread mixture designed using the new generation rubber technology, it provides high level handling in all road conditions.

It shows high performance on dry ground in summer and on snowy ground in winter.

Tread Profile

With its optimized base profile, it maintains contact with the ground in all conditions.

It provides safety in braking and starting on snowy surfaces.



Winter Tire

W870 Incurro

Designed for high traction and grip performance on snowy and icy surfaces. Provides stability on dry roads with special compound. Unique pattern design enables ultimate handling and cornering performance. Reduces stopping distance on slippery roads.



TRACTION AND GRIP IN WINTER CONDITIONS

■ PATTERN PROPERTIES



■ Center block contacts the road and provides a stable and balanced drive.



■ High performance on both dry and wet roads with asymmetrical pattern.



■ Reinforced and wide shoulder block increases road contact and enhances dry grip performance with high curving capability and maneuverability.



■ Intensely designed outer side provides better grip on dry and wet roads and increases the stability of the vehicle thanks to its special canal structure.



■ Minimised road / pattern noise enhances driving comfort with computer designed block array.



ALL SIZES

205/80 R16 RF	104T
235/75 R15 RF	109T
205/70 R15	96T
215/70 R15	98H
215/70 R16 RF	104H
225/70 R16 RF	107H
235/70 R16	106T
245/70 R16 RF	111T
255/70 R16	111T
265/70 R16	112T
215/65 R17	99H

225/65 R17 RF	106h
235/65 R17 RF	108V
245/65 R17 RF	111H
255/65 R17 RF	114H
265/65 R17 RF	116H
215/60 R17 RF	100H
225/60 R17 RF	103V
235/60 R17 RF	106H
255/60 R17 RF	110V
225/60 R18 RF	104V
235/60 R18 RF	107H

245/60 R18 RF	105H
255/60 R18 RF	112H
265/60 R18 RF	114H ^{RP}
235/55 R17 RF	103V ^{RP}
215/55 R18	95H ^{RP}
225/55 R18 RF	102H ^{RP}
235/55 R18 RF	104H ^{RP}
255/55 R18 RF	109V ^{RP}
255/55 R18 RF RFT	109H ^{RP}
205/55 R19 RF	97H ^{RP}
225/55 R19	99H ^{RP}
235/55 R19 RF	105V ^{RP}
245/55 R19	103H ^{RP}
255/55 R19 RF	111V ^{RP}

W870 Incurro

275/55 R19	111H ^{RP} ●●
235/50 R18 RF	101V ^{RP}
235/50 R19 RF	103V ^{RP}
255/50 R19 RF	107V ^{RP}
255/50 R19 RF RFT	107V ^{RP}
245/50 R20	102V ^{RP}
265/50 R20 RF	111H ^{RP}
225/45 R19 RF	96V ^{RP}
285/45 R19 RF	111H ^{RP} ●●
275/45 R20 RF	110V ^{RP} ●●
275/40 R20 RF	106V ^{RP} ●●
275/40 R20 RF RFT	106V ●●
315/35 R20 RF	110V ^{RP} ●●
315/35 R20 RF RFT	110V ●●



RF : REINFORCED
RFT : RUN FLAT
^{RP} : RIM PROTECTOR
 ●● : Sizes with two rib design

TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.



Winter Tire

W880 Incurro Ice

W880 Incurro Ice is specifically designed to endure the most extreme road and weather conditions. Guarantees perfection in safety by providing precise handling and short braking distances, even on snowy or icy roads. Optimized tread profile ensures continuous road contact, even in extreme weather conditions. Its outstanding performance is affirmed by the relentless testing conditions in Finland.



EXTREME PERFORMANCE FOR EXTREME CHALLENGES

■ PATTERN PROPERTIES



- Provides precise steering with its circumferential center rib that guarantees continuous contact with the surface.



- Offers ultimate performance thanks to its directional block structure.



- Ensures maximum braking safety on ice and snow with effective drainage of snow and melting water.



- The perfectly arranged sipe network transfers full braking power to the road and minimizes braking distance on frost-covered and icy roads.



- Multi-level block sides provide outstanding lateral grip for perfection in high speed bend turns.



- Multi-faceted groove bases strictly grab the surface to maximize traction and grip during acceleration and brakes.



■ ALL SIZES

245/70 R16 RF 111T

215/65 R16 RF 102T

215/60 R17 RF 100T

W880 Incurro Ice



■ TECHNOLOGY & BENEFITS

FST	Fine Silica Technology	Full silica tread compound remains flexible even at very low temperatures and ensures superb braking and handling on snow and ice.
High Tech Undertread Construction	Jointless "0" degree spiral nylon cover and wide steel belts	Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.
Jointless Mono Strand Bead Wire and Hard Bead Filler	Strengthens the link between tire and rim for a more precise driving experience.	Improve uniformity for a smoother ride and lateral stability at high speed cornering.







LIGHT TRUCK TIRES

ST850



SUMMER



ST850 plus



SUMMER



ST 860



SUMMER



ST 950



SUMMER



M+S WINTER



ST960



WINTER M+S



VanMaxx A/S



SUMMER



M+S WINTER



ST850 Provan

Designed for commercial light trucks, transporters and vans. Deep treads and straight ribs provide excellent handling in any kind of weather condition. Enhances cornering safety and thanks to its wear resistant special compound, offers durability.



ULTIMATE PERFORMANCE AND LONG LIFE UNDER HEAVY LOAD

■ PATTERN PROPERTIES



■ High performance on icy and wet surfaces with Z-shaped sipes.



■ Circumferential tiny groove on shoulder block provides resistance against irregular wear.



■ Computer simulated pitch frequency minimises road / pattern noise and improves comfort for a quieter ride.



■ Three wide circumferential grooves provide excellent water drainage and significantly reduce the risk of aquaplaning.





■ SIZE

195 R15 C

8PR

106/104R

ST850 Provan



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience

Improve uniformity for a smoother ride and lateral stability at high speed cornering.



ST850 Provan Plus

Radial summer tire designed with high technology. Offers high grip performance and wear resistance thanks to its special tread compound.



ENJOY THE ROAD EVEN
UNDER HEAVY LOAD

■ PATTERN PROPERTIES



■ Better grip and traction on wet or dry surfaces with Z shape tread design.



■ Specially formulized tread composition provides ultimate grip on asphalt.



■ Minimised road / pattern noise enhances driving comfort with computer designed block array.



■ Three circumferential channels provide excellent water discharge.





■ ALL SIZES

5.00 R12C	8PR	83/81P
155 R12 C	8PR	88/86N
155 R13 C	8PR	90/89R
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
205 R14 C	8PR	109/107P
215 R14 C	8PR	112/110P
185 R15 C	8PR	103/102R
175/75 R16 C	8PR	101/99R
185/75 R16 C	8PR	104/102R

195/75 R16 C	8PR	107/105R
205/75 R16 C	8PR	110/108R
205/75 R16 C	10PR	113/111R
215/75 R16 C	8PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	10PR	118/116R
165/70 R14 C	6PR	89/87R
195/70 R15 C	8PR	104/102R
205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107S

225/70 R15 C	8PR	112/110R
225/70 R15 C	10PR	116/114R
205/65 R15 C	8PR	102/100T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
225/65 R16 C	8PR	112/110R
235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R

ST850 Provan Plus



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.



ST860 Provan

Safe handling in all kind of situations, even under heavy loads. Wide contact area increases stability and enhances driving performance. Offers excellent mileage, rolling resistance and safety on wet roads.



ULTIMATE SUMMER PERFORMANCE

■ PATTERN PROPERTIES



■ Better grip and traction on wet or dry surfaces with Z shape tread design.



■ Specially formulized tread composition provides ultimate grip on asphalt.



■ Minimised road / pattern noise enhances driving comfort with computer designed block array.



■ Three circumferential channels provide excellent water discharge.





■ ALL SIZES

205/75 R16 C	8PR	110/108R	215/65 R16 C	8PR	109/107T
215/75 R16 C	8PR	113/111R	235/65 R16 C	8PR	115/113R
215/75 R16 C	10PR	116/114R	235/65 R16 C	12PR	121/119R
225/70 R15 C	8PR	112/110R	285/65 R16 C	10PR	128N ●●
215/65 R15 C	6PR	104/102T	195/60 R16 C	6PR	99/97T
195/65 R16 C	8PR	104/102T			
205/65 R16 C	8PR	107/105T			

●● : Sizes with two rib design

ST860 Provan



■ TECHNOLOGY & BENEFITS

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.



All Weather Tire ST950 Prowin

Designed for all weather performance. Offers excellent traction in difficult conditions thanks to its V shaped special tread pattern design.



DON'T WORRY ABOUT THE LOAD IN WINTER

■ PATTERN PROPERTIES



- Optimised shoulder width increases footprint pressure resulting in higher traction and grip on snow and ice.



- Multi sipes enhance handling and braking performance.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for a quieter ride.



- Stiff shoulder blocks improve cornering and maneuverability even at high speeds and ensure even wear on shoulders.



- Sharp edges on shoulder improve cornering performance.



- Wide circumferential and lateral grooves provide exceptional water drainage and reduce the risk of aquaplaning.



■ ALL SIZES

155 R 12 C	8PR	88/86N	225/75 R16 C	10PR	118/116R
155 R 13 C	8PR	90/89N	195/70 R 15 C	8PR	104/102R
185 R 14 C	8PR	102/100R	205/70 R 15 C	8PR	106/104R
195 R 14 C	8PR	106/104R	215/70 R 15 C	8PR	109/107R
175/75 R 16 C	8PR	101/99R	225/70 R 15 C	8PR	112/110R
185/75 R 16 C	8PR	104/102R	205/65 R 15 C	8PR	102/100T
195/75 R 16 C	8PR	107/105R	205/65 R 16 C	8PR	107/105T
205/75 R 16 C	8PR	110/108R	215/65 R 16 C	8PR	109/107R
215/75 R 16 C	8PR	113/111R	225/65 R 16 C	8PR	112/110R
225/75 R 16 C	8PR	118/116R	235/65 R 16 C	8PR	115/113R
			195/60 R 16 C	6PR	99/97T

ST950 Prowin



■ TECHNOLOGY & BENEFITS

FST

Fine Silica Technology

Full silica tread compound remains flexible even at very low temperatures ensuring superb braking and handling on snow and ice.

High Tech Undertread Construction

Jointless "0" degree spiral nylon cover and wide steel belts

Enhances durability and resistance against tread wear while improving uniformity for a smoother ride.

Jointless Mono Strand Bead Wire and Hard Bead Filler

Strengthens the link between tire and rim for a more precise driving experience.

Improve uniformity for a smoother ride and lateral stability at high speed cornering.



Winter Tire

ST960 Prowin

Unique tread design with wavy sipes enables high grip performance on icy surfaces. Offers safety and durability.



SAFETY FOR LIGHT TRUCKS ON WET, SNOWY OR ICY ROADS

■ PATTERN PROPERTIES



- Optimised shoulder width increases footprint pressure resulting in higher traction and grip on snow and ice.



- Multi sipes enhances handling and braking performance.



- Computer simulated pitch frequency minimizes road/pattern noise improving comfort for a quieter ride.



- Stiff shoulder blocks improve cornering and maneuverability even at high speeds and ensure even wear on shoulders.



- Wide circumferential and lateral grooves provide exceptional water drainage and reduce the risk of aquaplaning.





■ ALL SIZES

155 R12 C	8PR	88/86N
155 R13 C	8PR	90/89N
185 R14 C	8PR	102/100R
195 R14 C	8PR	106/104R
185/75 R16 C	8PR	104/102R
195/75 R16 C	8PR	107/105R
205/75 R16 C	10PR	113/111R
215/75 R16 C	10PR	116/114R
225/75 R16 C	8PR	118/116R

195/70 R15 C	8PR	104/102R
205/70 R15 C	8PR	106/104R
215/70 R15 C	8PR	109/107R
225/70 R15 C	8PR	112/110R
195/65 R16 C	6PR	104/102T
205/65 R16 C	8PR	107/105T
215/65 R16 C	8PR	109/107R
215/65 R15 C	8PR	104/102T
225/65 R16 C	8PR	112/110R

235/65 R16 C	8PR	115/113R
235/65 R16 C	12PR	121/119R
285/65 R16 C	10PR	128N ●●
195/60 R16 C	6PR	99/97T

ST960 Prowin

●● : Sizes with two rib design



■ TECHNOLOGY & BENEFITS

High Tech
Undertread
Construction

Jointless "0" degree spiral
nylon cover and wide
steel belts

Enhances durability and resistance against tread wear while
improving uniformity for a smoother ride.

Jointless Mono
Strand Bead Wire and
Hard Bead Filler

Strengthens the link between
tire and rim for a more precise
driving experience.

Improve uniformity for a smoother ride and lateral stability
at high speed cornering.



All Weather Tire

VanMaxx A/S

All season light commercial vehicle tire developed for use in all weather and road conditions approved for use on snow.



IN ALL WEATHER AND ROAD CONDITIONS

■ PATTERN PROPERTIES



- Provides balanced performance on dry, wet and snowy surfaces with its optimized lamellar density.



- Offers superior water and snow discharge with its 3 environmental channels.



- With its symmetrical tread pattern and optimized full-empty ratio, it provides quiet driving and increased driver comfort on dry roads, safe braking distance on wet roads, and safe handling on snow.





■ ALL SIZES

155 R12 C	88/86N	225/75 R16 C	118/116R	235/65 R16 C	121/119R
155 R13 C	90/89R	195/70 R15 C	104/102R	285/65 R16 C	131R
185 R14 C	102/100R	215/70 R15 C	109/107S	195/60 R16 C	99/97T
195 R14 C	106/104R	225/70 R15 C	116/114R	215/60 R17 C	109/107T
185/75 R16 C	104/102R	205/65 R16 C	107/105T	215/75 R16 C	116/114R
195/75 R16 C	107/105R	215/65 R15 C	104/102T		
205/75 R16 C	113/111R	215/65 R16 C	109/107T		
215/75 R16 C	116/114R	225/65 R16 C	112/110R		

VanMaxx A/S



■ TECHNOLOGY & BENEFITS

Strength Carcass Structure

With its high-strength carcass structure, it offers safety in use throughout the year.

Innovative Tread Pattern

With its innovative tread mixture, it provides the opportunity to use all year round, in variable weather and road conditions.



ST330 TOLERO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/80 R12	77	T	412	190	35
155/80 R13	79	T	437	190	35
165/80 R13	83	T	487	190	35
165/80 R13 RF	87	R	545	170	41
175/80 R14	88	T	560	190	35
165/80 R15	87	T	545	190	35
145/70 R12	69	T	325	190	36
155/70 R12	73	T	365	190	36
165/70 R12	77	T	412	190	36
175/70 R12	80	T	450	190	36
145/70 R13	71	T	345	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
165/70 R13 RF	83	T	487	190	42
175/70 R13	82	T	475	190	36
185/70 R13	86	T	530	190	36
165/70 R14	81	T	462	190	36
165/70 R14 RF	85	R	515	170	42
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
195/70 R14	91	T	615	190	36
195/70 R15 RF	97	T	730	190	42
155/65 R13	73	T	365	190	36
165/65 R13	77	T	412	190	36
175/65 R13	80	T	450	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
195/65 R14	89	H	580	210	36
175/65 R15	84	T	500	190	36
185/65 R15	88	T	560	190	36
195/65 R15	91	T	690	190	42
195/65 R15 RF	95	T	615	190	36
165/60 R14	75	T	387	190	36

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4,50B	4,00B, 5,00B	156	554	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	156	580	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J, 5,50B, 5½J	166	595	D	C	69	B
5J	4½J, 5½J, 6J	177	637	D	C	69	B
4½J	4J, 5J, 5½J	165	646	D	C	69	B
4,50B	3,50B, 4,00B, 5,00B	145	512	D	C	69	B
4,50B	4,00B, 5,00B	156	526	D	C	69	B
5,00B	4,00B, 4,50B, 5,50B	169	539	D	C	69	B
5,00B	4,50B, 5,50B, 6,00B	177	555	D	C	69	B
4,50B, 4½J	3,50B, 3½J, 4,00B, 4J, 5,00B, 5J	146	539	D	C	69	B
4,50B, 4½J	4,00B, 4J, 5,00B, 5J	155	554	D	C	69	B
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	D	C	69	B
5,00B, 5J	4,00B, 4J, 4,50B, 4½J, 5,50B, 5½J	168	565	D	C	69	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	177	582	D	C	69	B
5,50B, 5½J	4,50B, 4½J, 5,00B, 5J, 6,00B, 6J	189	592	D	C	69	B
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	D	C	69	B
5,00B, 5J	4J, 4,50B, 4½J, 5,50B, 5½J	168	590	D	C	69	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	D	C	69	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	177	605	D	C	69	B
5½J	4½J, 5J, 6J	193	618	D	C	69	B
6J	5J, 5½J, 6½J	201	630	D	C	69	B
6J	5J, 5½J, 6½J	203	658	C	C	69	B
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	154	534	D	C	69	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	170	550	D	C	69	B
5,00B, 5J	5,50B, 5½J, 6,00B, 6J	175	560	D	C	69	B
4,50B, 4½J	5,00B, 5J, 5,50B, 5½J	155	561	D	C	69	B
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6J	170	577	D	C	69	B
5,00B, 5J	5,50B, 5½J, 6J	174	586	D	C	69	B
5,00B, 5J	5,50B, 5½J, 6J	174	586	D	C	69	B
5½J	5J, 6J, 6½J	189	602	D	C	69	B
6J	5½J, 6½J, 7J	200	613	D	C	69	B
5J	5½J, 6J	175	610	D	C	69	B
5½J	5J, 6J, 6½J	189	627	D	C	69	B
6J	5½J, 6½J, 7J	200	641	D	C	69	B
6J	5½J, 6½J, 7J	201	641	D	C	69	B
5,00B, 5J	4½J, 5½J, 6J	169	558	D	C	69	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST532 NOVARO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R13	82	H	475	210	36
175/70 R14	84	H	500	210	36
175/70 R14 RF	88	H	560	210	42
185/70 R14	88	H	560	210	36
175/65 R14	82	H	475	210	36
175/65 R14 RF	86	T	530	190	42
175/65 R15	84	H	500	210	36
185/65 R14	86	H	530	210	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15	91	V	615	240	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
205/65 R15 RF	99	H	670	240	36
205/65 R15	94	V	775	210	42
215/65 R15	96	V	710	240	36
205/65 R16	95	H	690	210	36
215/65 R16	98	H	750	210	36
215/65 R16	98	V	750	240	36
175/60 R13	77	H	412	210	36
185/60 R14	82	H	475	210	36
195/60 R14	86	H	530	210	36
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
195/60 R15	88	V	560	240	36
205/60 R14	88	V	560	240	36
205/60 R15	91	H	615	210	36
205/60 R15	91	V	615	240	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
205/60 R16 RF	96	V	710	240	42
185/55 R15	82	V	475	240	36
205/55 R15	88	V	560	240	36
195/55 R16	87	V	545	240	36
205/55 R16	91	H	615	210	36
205/55 R16	91	V	615	240	36
215/55 R16	93	V	650	240	36
205/50 R15*	86	W	530	270	36

*Sizes with rim guard

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4,50B, 4½J, 5,50B, 5½J, 6,00B, 6J	179	578	C	B	70	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	C	B	70	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	605	C	B	70	B
5½J	4½J, 5J, 6J	189	616	C	B	70	B
5,00B, 5J	5,50B, 5½J, 6J	177	589	C	B	70	B
5,00B, 5J	5,50B, 5½J, 6J	177	589	C	B	70	B
5J	5½J, 6J	177	615	C	B	70	B
5½J	5J, 6J, 6½J	190	600	C	B	70	B
5½J	5J, 6J, 6½J	189	625	C	B	70	B
5½J	5J, 6J, 6½J	189	625	C	B	70	B
6J	5½J, 6½J, 7J	201	638	C	B	71	B
6J	5½J, 6½J, 7J	201	638	C	B	71	B
6J	5½J, 6½J, 7J	201	638	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	650	C	B	71	B
6½J	6J, 7J, 7½J	221	662	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	209	675	C	B	71	B
6½J	6J, 7J, 7½J	223	688	C	B	71	B
6½J	6J, 7J, 7½J	223	688	C	B	71	B
5J	5,00B, 5,50B, 5½J, 6,00B, 6J	174	541,5	D	B	70	B
5½J	5J, 6J, 6½J	189	582	C	B	70	B
6J	5½J, 6½J, 7J	200	593	C	B	71	B
5½J	5J, 6J, 6½J	189	609	C	B	70	B
5½J	5J, 6J, 6½J	189	609	C	B	70	B
6J	5½J, 6½J, 7J	198	622	C	B	71	B
6J	5½J, 6½J, 7J	198	622	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	204	599,5	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	209	630	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210	655	C	B	71	B
6J	5½J, 6½J, 7J, 7½J	210,6	654,8	C	B	71	B
6J	5J, 5½J, 6½J	192	592	C	B	70	B
6½J	5½J, 6J, 7J, 7½J	216	609	C	B	71	B
6J	5½J, 6½J, 7J	199	625	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	213	636	C	B	71	B
7J	6J, 6½J, 7½J	226	642	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	211	589	C	B	71	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST542 NATUREN

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
175/65 R14	82	T	475	190	36
185/65 R14	86	T	530	190	36
185/65 R15	88	T	560	190	36
185/65 R15	88	H	560	210	36
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	T	690	190	42
195/65 R15	91	V	615	240	36
205/65 R15	94	H	670	210	36
185/60 R14	82	H	475	210	36
185/60 R15	84	H	500	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
205/60 R16	92	H	630	210	36
205/60 R16	92	V	630	240	36
205/60 R16 RF	96	V	710	240	42
215/60 R16	95	V	690	240	36
185/55 R14*	80	H	450	210	36
185/55 R15*	82	V	475	240	36
195/55 R15*	85	H	515	210	36
195/55 R16*	87	H	545	210	36
205/55 R16*	91	H	615	210	36
195/50 R15*	82	H	475	210	36
195/50 R16 RF*	88	V	560	240	42

*Sizes with rim guard

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	B
5,00B, 5J	4½J, 5,50B, 5½J, 6J	178	599,5	C	C	69	B
5½J	4½J, 5J, 6J	192	613	C	C	69	B
5,00B, 5J	5,50B, 5½J, 6J	179	582	C	C	69	B
5½J	5J, 6J, 6½J	190	596	C	C	69	B
5½J	5J, 6J, 6½J	190	620	C	C	69	B
5½J	5J, 6J, 6½J	190	620	C	C	69	B
6J	5½J, 6½J, 7J	206	633	C	B	69	B
6J	5½J, 6½J, 7J	206	633	C	B	69	B
6J	5½J, 6½J, 7J	206	633	C	B	69	A
6J	5½J, 6½J, 7J, 7½ J	206	646	C	B	69	B
5½J	5J, 6J, 6½J	186	574	C	C	69	B
5½J	5J, 6J, 6½J	184	603,5	C	C	69	B
5½J	5J, 6J, 6½J	184	603,5	C	C	69	B
6J	5½J, 6½J, 7J	201	615	C	B	69	B
6J	5½J, 6½J, 7J, 7½ J	204	650	C	B	69	B
6J	5½J, 6½J, 7J, 7½ J	204	650	C	B	69	B
6J	5½J, 6½J, 7J, 7½J	207,4	647,4	C	B	69	B
6½J	6J, 7J, 7½J	221	663	C	B	69	B
6J	5J, 5½J, 6½J	193	556	C	C	69	B
6J	5J, 5½J, 6½J	193	582	C	C	69	B
6J	5½J, 6½J, 7J	200	593	C	B	69	B
6J	5½J, 6½J, 7J	200	618	C	B	69	B
6½J	5½J, 6J, 7J, 7½J	214	632	C	B	69	B
6J	5½J, 6½J, 7J	200	573	C	B	69	B
6J	5½J, 6½J, 7J	200	598	C	B	69	A

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.




*All figures are for reference; our company is not responsible for printing errors.



ST760 ULTRA SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
215/60 R16 RF	99	V	775	240	42
225/60 R16	98	V	750	240	36
235/60 R16	100	W	800	270	36
195/55 R15	85	V	515	240	36
185/55 R16 RF*	87	H	545	210	42
195/55 R16	87	V	545	240	36
195/55 R16 RFT	87	V	545	240	36
205/55 R16 RFT	91	V	670	270	42
205/55 R16 RF*	94	W	615	240	36
215/55 R16 RF*	97	W	730	270	42
225/55 R16 RF*	99	W	775	270	42
205/55 R17 RF*	95	W	690	270	42
215/55 R17 RF*	98	W	750	270	42
225/55 R17 RF*	101	W	825	270	42
225/55 R17 RFT	97	W	730	270	36
235/55 R17 RF*	103	W	875	270	42
235/55 R18 RF*	104	W	900	270	42
195/50 R15	82	V	475	240	36
195/50 R16	84	V	500	240	36
205/50 R16 RF*	91	W	615	270	42
225/50 R16 RF*	96	W	710	270	42
205/50 R17 RF*	93	W	650	270	42
205/50 R17 RFT	89	W	580	270	36
215/50 R17 RF*	95	W	690	270	42
225/50 R17 RF*	98	W	750	270	42
225/50 R17 RFT	94	W	670	270	36
235/50 R18 RF*	101	W	825	270	42
245/50 R18	100	W	800	270	36
245/50 R18 RFT	100	W	800	270	36
195/45 R16 RF*	84	V	500	240	42
205/45 R16 RF*	87	W	545	270	42
215/45 R16 RF*	90	V	600	240	42
205/45 R17 RF*	88	W	560	270	42
215/45 R17 RF*	91	W	615	270	42
225/45 R17 RF*	94	W	670	270	42
225/45 R17 RFT	91	W	615	270	36
235/45 R17 RF*	97	W	730	270	42
245/45 R17 RF*	99	W	775	270	42
215/45 R18 RF*	93	W	650	270	42
225/45 R18 RF*	95	W	690	270	42
225/45 R18 RFT	91	W	615	270	36
235/45 R18 RF*	98	W	750	270	42
245/45 R18 RF*	100	W	800	270	42
245/45 R18 RFT	96W	710	270	36	
255/45 R18 RF*	103	W	875	270	42
275/45 R18 RF*	107	W	975	270	42
225/45 R19 RF*	96	W	710	270	42
235/45 R19 RF*	99	W	775	270	42
245/45 R19 RF*	102	W	850	270	42
245/45 R19 RFT	98	W	750	270	36
255/45 R19 RF*	104	Y	900	300	42
205/40 R16 RF*	83	W	487	270	42
215/40 R16 RF*	86	W	530	270	42
205/40 R17 RF*	84	W	500	270	42
215/40 R17 RF*	87	W	545	270	42
235/40 R17 RF*	94	W	670	270	42
245/40 R17 RF*	95	W	690	270	42

*Sizes with rim guard




RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J	225	665	C	B	71	B
6½J	6J, 7J, 7½J, 8J	233	677	C	B	71	B
7J	6½J, 7½J, 8J, 8½J	240	690	C	B	71	B
6J	5½J, 6½J, 7J	200	595	D	C	71	B
6J	5J, 5½J, 6½J	191	610	D	C	70	B
6J	5½J, 6½J, 7J	201	620	D	C	71	B
6J	5½J, 6½J, 7J	201	620	D	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	632	D	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	635	D	C	71	B
7J	6J, 6½J, 7½J	228	642	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	654	C	B	71	B
6,5J	5½J, 6J, 7J, 7½J	217,5	652	D	C	71	B
7J	6J, 6½J, 7½J	226	668	C	B	71	B
7J	6J, 6½J, 7½J, 8J	228	688	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	680	D	B	71	B
7½J	6½J, 7J, 8J, 8½J	246	692	C	B	71	B
7½J	6½J, 7J, 8J, 8½J	246	718	C	B	71	B
6J	5½J, 6½J, 7J	196	582	D	C	71	B
6J	5½J, 6½J, 7J	195	608	D	C	71	B
6½J	5½J, 6J, 7J, 7½J	214	612	D	C	71	B
7J	6J, 6½J, 7½J, 8J	233	632	C	B	71	B
6½J	5½J, 6J, 7J, 7½J	214	638	C	C	71	B
6½J	5½J, 6J, 7J, 7½J	210	640	D	C	71	B
7J	6J, 6½J, 7½J	226	648	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	658	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	658	D	B	71	B
7½J	6½J, 7J, 8J, 8½J	245	693	C	B	71	B
7½J	7J, 8J, 8½J	245	708	D	B	71	B
7½J	7J, 8J, 8½J	245	708	D	B	71	B
6½J	6J, 7J, 7½J	195	582	D	C	71	B
7J	6½J, 7½J	206	596	D	C	71	B
7J	7½J, 8J	215	600	D	B	71	B
7J	6½J, 7½J	206	623	D	C	71	B
7J	7½J, 8J	211	627	C	B	71	B
7½J	7J, 8J, 8½J	222	642	D	B	71	B
7½J	7J, 8J, 8½J	226	636	D	B	71	B
8J	7½J, 8½J, 9J	236	650	C	B	71	B
8J	7½J, 8½J, 9J	243	652	C	B	71	B
7J	7½J, 8J	213	655	C	B	71	B
7½J	7J, 8J, 8½J	225	659	D	B	71	B
7½J	7J, 8J, 8½J	226	660	D	B	71	B
8J	7½J, 8½J, 9J	236	669	C	B	71	B
8J	7½J, 8½J, 9J	243	677	C	B	71	B
8J	7½J, 8½J, 9J	243	677	D	B	71	B
8½J	8J, 9J, 9½J	257	692	C	B	72	B
9J	8½J, 9½J, 10J, 10½J	269,8	705,6	C	B	72	B
7½J	7J, 8J, 8½J	225	693	D	B	71	B
8J	7½J, 8½J, 9J	238	694	D	B	71	B
8J	7½J, 8½J, 9J	243	703	C	B	71	B
8J	7½J, 8½J, 9J	243	703	D	B	71	B
8½J	8J, 9J, 9½J	257	718	C	B	72	B
7½J	7J, 8J	212	570	D	C	71	B
7½J	7J, 8J, 8½J	218	580	D	B	71	B
7½J	7J, 8J	216	601	D	C	71	B
7½J	7J, 8J, 8½J	218	608	D	B	71	B
8½J	8J, 9J, 9½J	241	622	D	B	71	B
8½J	8J, 9J, 9½J	246	635	D	B	71	B

SEE NEXT PAGE FOR THE REST OF SIZES ►

ST760 ULTRA SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
215/40 R18 RF*	89	W	580	270	42
215/40 R18 RF RFT	85	Y	515	300	36
225/40 R18 RF*	92	Y	630	300	42
225/40 R18 RF RFT*	92	Y	630	300	42
235/40 R18 RF*	95	W	690	270	42
245/40 R18 RF*	97	W	730	270	42
245/40 R18 RFT	93	W	650	270	36
255/40 R18	95	W	690	270	36
255/40 R18 RFT	95	Y	690	300	36
265/40 R18 RF*	101	Y	825	300	42
275/40 R18 RF*	103	Y	875	300	42
275/40 R18 RF RFT	99	Y	775	300	36
225/40 R19 RF*	93	W	650	270	42
225/40 R19 RF RFT*	93	Y	650	300	42
235/40 R19 RF*	96	Y	710	300	42
245/40 R19 RF*	98	W	750	270	42
245/40 R19 RFT	94	W	670	270	36
255/40 R19 RF*	100	W	800	270	42
265/40 R19 RF*	102	W	850	270	42
275/40 R19 RF*	105	Y	925	300	42
275/40 R19 RFT	101	Y	825	300	36
285/40 R19 RF*	107	W	975	270	42
245/40 R20 RF*	99	W	775	270	42
245/40 R20 RF RFT	99	Y	775	300	42
255/40 R20 RF*	101	W	825	270	42
245/35 R17	87	W	545	270	36
215/35 R18 RF*	84	W	500	270	42
225/35 R18 RF*	87	W	545	270	42
245/35 R18 RF*	92	W	630	270	42
245/35 R18 RFT	88	Y	560	300	36
255/35 R18 RF*	94	Y	670	300	42
255/35 R18 RFT	90	Y	600	300	36
265/35 R18 RF*	97	W	730	270	42
275/35 R18 RF*	99	W	775	270	42
275/35 R18 RFT	95	Y	690	300	36
285/35 R18 RF*	101	W	825	270	42
285/35 R18 RFT	97	Y	730	300	36
295/35 R18	99	Y	775	300	36
215/35 R19 RF*	85	W	515	270	42
225/35 R19 RF*	88	W	560	270	42
225/35 R19 RF RFT	88	Y	560	300	42
235/35 R19 RF*	91	W	615	270	42
245/35 R19 RF*	93	W	650	270	42
245/35 R19 RF RFT*	93	Y	650	300	42
255/35 R19 RFT	92	W	710	270	42
255/35 R19 RF*	96	W	630	270	36
265/35 R19 RF*	98	W	750	270	42
275/35 R19 RF*	100	W	800	270	42
275/35 R19 RFT	96	W	710	270	36
285/35 R19	99	Y	775	300	36
285/35 R19 RF RFT*	99	Y	775	300	36
295/35 R19 RF*	104	W	900	270	42
225/35 R20 RF*	90	Y	600	300	42
225/35 R20 RF RFT	90	Y	600	300	42
245/35 R20 RF*	95	W	690	270	42
245/35 R20 RF RFT	95	Y	690	300	42
255/35 R20 RF*	97	W	730	270	42

*Sizes with rim guard

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7½J	7J, 8J, 8½J	217	633	D	B	71	B
7½J	7J, 8J, 8½J	223	627	D	B	71	B
8J	7½J, 8½J, 9J	233	642	D	B	71	B
8J	7½J, 8½J, 9J	233,5	633	D	B	71	B
8½J	8J, 9J, 9½J	241	645	D	B	71	B
8½J	8J, 9J, 9½J	248,5	657	C	B	71	B
8½J	8J, 9J, 9½J	245	662	D	B	71	B
9J	8½J, 9½J, 10J	257	660	D	B	72	B
9J	8,5J, 9,5J, 10J	262	656,5	D	B	72	B
9½J	9J, 10J, 10½J,	277,4	664,9	C	B	72	B
9½J	9J, 10J, 10½J, 11J	282,5	673,8	D	B	72	B
9½J	9J, 10J, 10½J, 11J	285	673	D	B	72	B
8J	7½J, 8½J, 9J	230	663	C	B	71	B
8J	7½J, 8½J, 9J	234	660	D	B	71	B
8½J	8J, 9J, 9½J	236,5	670,7	C	B	71	B
8½J	8J, 9J, 9½J	248	683	D	B	71	B
8½J	8J, 9J, 9½J	248	682	D	B	71	B
9J	8½J, 9½J, 10J	258	692	C	B	72	B
9½J	9J, 10J, 10½J	275	690	D	B	72	B
9½J	9J, 10J, 10½J,	281	697,4	C	B	72	B
9½J	9J, 10J, 10½J, 11J	285	696,5	D	B	72	B
10J	9½J, 10½J, 11J	291,5	707,9	C	B	72	A
8½J	8J, 9J, 9½J	244	710	D	B	71	B
8½J	8J, 9J, 9½J	251,5	703	D	B	71	B
9J	8½J, 9½J, 10J	257	711	D	B	72	B
8½J	8J, 9J, 9½J	243	608	D	B	71	B
7½J	7J, 8J, 8½J	216	613	D	B	71	B
8J	7½J, 8½J, 9J	227	625	D	B	71	B
8½J	8J, 9J, 9½J	242	636	D	B	71	B
8½J	8J, 9J, 9½J	248	632	D	B	71	B
9J	8½J, 9½J, 10J	257,5	635,5	D	B	72	B
9J	8½J, 9½J, 10J	257,5	631,5	D	B	72	B
9½J	9J, 10J, 10½J	268	647	C	B	72	B
9½J	9J, 10J, 10½J, 11J	270	656	D	B	72	B
9½J	9J, 10J, 10½J, 11J	278	650	D	B	72	B
9½J	10J, 10½J, 11J	291	656	C	B	72	A
10J	9½J, 10½J, 11J	290	657	D	B	72	B
10½J	10J, 11J, 11½J	301,9	661,8	D	B	72	B
7½J	7J, 8J, 8½J	217	640	D	B	71	B
8J	7½J, 8½J, 9J	231	644	D	B	71	B
8J	7½J, 8½J, 9J	233,5	641,5	D	B	71	B
8J	8½J, 9J, 9½J	236	654	D	B	71	B
8½J	8J, 9J, 9½J	241	662	D	B	71	B
8,5J	8J, 9J, 9½J	243,5	657	D	B	71	B
9J	8½J, 9½J, 10J	253	665	D	B	72	B
9J	8½J, 9½J, 10J	254	664	D	B	72	B
9½J	9J, 10J, 10½J	266	675	D	B	72	B
9½J	9J, 10J, 10½J, 11J	268	682	D	B	72	B
9½J	9J, 10J, 10½J, 11J	273	674	D	B	72	B
10J	9½J, 10½J, 11J	290,6	681,8	D	B	72	B
10J	9½J, 10½J, 11J	290	682	D	B	72	B
10½J	10J, 11J, 11½J	299,5	688,2	D	B	72	A
8J	7½J, 8½J, 9J	229,4	668,7	D	B	71	B
8J	7½J, 8½J, 9J	234	665	D	B	71	B
8½J	8J, 8½J, 9J, 9½J	243	689	D	B	71	B
8,5J	8J, 9J, 9½J	249	682,5	D	B	71	B
9J	8½J, 9½J, 10J	254	692	D	B	72	B

SEE NEXT PAGE FOR THE REST OF SIZES ►

ST760 ULTRA SPORT

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
265/35 R20 RF*	99	W	775	270	42
275/35 R20 RF*	102	Y	850	300	42
275/35 R20 RF RFT *	102	Y	850	300	42
295/35 R20 RF*	105	W	925	270	42
245/30 R19 RF*	89	W	580	270	42
255/30 R19 RF*	91	W	615	270	42
255/30 R19 RF RFT	91	Y	615	300	42
265/30 R19 RF*	93	W	650	270	42
275/30 R19 RF*	96	W	710	270	42
275/30 R19 RF RFT	96	W	710	270	42
285/30 R19 RF*	98	W	750	270	42
295/30 R19 RF*	100	W	800	270	42
305/30 R19 RF*	102	W	850	270	42
245/30 R20 RF*	90	Y	600	300	42
255/30 R20 RF*	92	Y	630	300	42
255/30 R20 RF RFT	92	Y	630	300	42
265/30 R20 RF*	94	Y	670	300	42
275/30 R20 RF*	97	W	730	270	42
275/30 R20 RF RFT	97	Y	730	300	42
285/30 R20 RF*	99	W	775	270	42
295/30 R20 RF*	101	W	825	270	42
305/30 R20 RF*	103	W	875	270	42

*Sizes with rim guard

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
9½J	9J, 10J, 10½J	273,1	693,9	D	B	72	B
9½J	9J, 10J, 10½J, 11J	273	700,2	C	B	72	B
9,5J	9J, 10J, 10½J, 11J	275	699,5	D	B	72	B
10½J	10J, 11J, 11½J	300,1	714	C	B	72	A
8½J	8J, 9J	243,1	632,2	D	B	71	B
9J	8½J, 9½J	255	636,5	D	B	72	B
9J	8,5J, 9,5J	256	637	D	B	72	B
9½J	9J, 10J	266,2	645,8	D	B	72	B
9½J	9J, 10J	270,2	649,3	D	B	72	B
9½J	9J, 10J	273	649	D	B	72	B
10J	9½J, 10½J	285	658	D	B	72	A
10½J	10J, 11J	304	661	D	B	72	A
11J	10½J, 11½J	315,5	662	D	B	72	A
8½J	8J, 9J	242,4	656,9	D	B	71	B
9J	8½J, 9½J	255	663,7	D	B	72	B
9J	8½J, 9½J	256	663	D	B	72	B
9½J	9J, 10J	265,7	669	D	B	72	B
9½J	9J, 10J	270	677	D	B	72	B
9,5J	9J, 10J	273	675	D	B	72	B
10J	8J, 9J, 9½J	288	683	D	B	72	A
10½J	10J, 11J	307	685,3	D	B	72	A
11J	10½J, 11½J	315,3	687	C	B	72	A

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



ST582 Maxxout

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
175/70 R13	82	T	475	190	36
175/70 R14*	84	T	500	190	36
175/65 R14	82	T	475	190	36
185/65 R14	86	T	530	190	36
175/65 R15	84	H	500	210	36
185/65 R15	88	T	560	190	36
185/65 R15	88	H	560	210	36
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
215/65 R16 RF	102	V	850	240	42
185/60 R14	82	H	475	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
205/60 R16	96	V	710	240	42
215/60 R16 RF	99	V	775	240	42
185/55 R14	80	H	450	210	36
185/55 R15 RF	86	H	530	210	42
195/55 R15	85	H	515	210	36
195/55 R16	87	H	545	210	36
205/55 R16	91	H	615	210	36
205/55 R16	91	V	615	240	36
205/55 R16 RF	94	V	670	240	42
215/55 R16 RF	97	V	730	240	42
225/55 R16 RF*	99	W	775	270	42
205/55 R17 RF	95	W	690	270	42
215/55 R17 RF	98	W	750	270	42
225/55 R17 RF*	101	W	825	270	42
235/55 R17 RF*	103	W	875	270	42
195/55 R20 RF	95	H	690	210	42
195/50 R15*	82	V	475	240	36
195/50 R16 RF*	88	V	560	240	42
205/50 R17 RF*	93	W	650	270	42
215/50 R17 RF*	95	W	690	270	42
225/50 R17 RF*	98	V	750	240	42
195/45 R16 RF*	84	V	500	240	42
215/45 R16 RF*	90	V	600	240	42
205/45 R17 RF*	88	W	560	270	42
215/45 R17 RF*	91	W	615	270	42
225/45 R17 RF*	94	W	670	270	42
235/45 R17 RF*	97	W	730	270	42
245/45 R17 RF*	99	Y	775	300	42
225/45 R18 RF*	95	W	690	270	42
225/45 R18 RF*	95	Y	690	300	42
235/45 R18 RF*	98	W	750	270	42
245/45 R18 RF*	100	W	800	270	42
225/45 R19 RF*	96	W	710	270	42
245/40 R17 RF*	95	Y	690	300	42
225/40 R18 RF*	92	W	630	270	42
235/40 R18 RF*	95	Y	690	300	42
245/40 R18 RF	97	Y	730	300	42
235/40 R19 RF*	96	Y	710	300	42
235/35 R19 RF*	91	Y	615	300	42
245/35 R19 RF*	93	Y	650	300	42
255/35 R19 RF*	96	Y	710	300	42

*Sizes with rim guard

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4.5J	4.00B,4J,4.50B,4 1/2 J,5.00B,5J	152,4	549,1	D	C	71	B
5J	4.50B,4 1/2 J,5.00B,5J,5.50B,5 1/2 J,6.00B,6J	166,5	560,2	D	C	71	B
5J	4.50B,4 1/2 J,5.00B,5.50B,5 1/2 J,6.00B,6J	173	578	C	C	71	B
5J	4 1/2 J, 5.00B, 5.50B, 5 1/2 J, 6J	172,9	603,8	C	C	71	B
5J	5.00B, 5.50B, 5 1/2 J, 6J	174,7	583,8	C	C	71	B
5,5J	5, 6J, 6 1/2 J	187	599	C	C	71	B
5J	5 1/2 J, 6J	175	609	C	C	71	B
5,5J	5J, 6J, 6 1/2 J	187	624	C	C	71	B
5,5J	5J, 6J, 6 1/2 J	187	624	C	C	71	B
6J	5 1/2 J, 6 1/2 J, 7J	204,8	635	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	204,8	635	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J, 7 1/2 J	205,5	646,8	C	C	72	B
6,5J	6J, 7J, 7 1/2 J	217,5	690	B	C	72	B
5,5J	5J, 6J, 6 1/2 J	184,5	582	C	C	71	B
5,5J	5J, 6J, 6 1/2 J	183,5	604,2	C	C	71	B
6J	5 1/2 J, 6J, 6 1/2 J, 7J	201,3	618,5	C	C	72	B
6J	5 1/2 J, 6J, 6 1/2 J, 7J, 7 1/2 J	208,7	652,5	B	C	72	B
6 1/2 J	6J, 6 1/2 J, 7J, 7 1/2 J	218,6	667,8	B	C	72	B
6J	5J, 5 1/2 J, 6 1/2 J	194	564	C	C	71	B
6J	5J, 5 1/2 J, 5 1/2 J	192,4	588,6	C	C	71	B
6J	5 1/2 J, 6 1/2 J, 7J	202,3	595,9	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	200,6	620,4	C	C	72	B
6,5J	5 1/2 J, 6J, 7J, 7 1/2 J	209	636,3	C	C	72	B
6,5J	5 1/2 J, 6J, 7J, 7 1/2 J	209	638	C	C	72	B
6,5J	5 1/2 J, 6J, 7J, 7 1/2 J	209	638	C	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J	227,1	645	B	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J, 8J	232,8	657,9	C	C	72	B
6 1/2 J	5 1/2 J, 6J, 7J, 7 1/2 J	211,5	658,6	B	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J	220,9	672	B	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J, 8J	232,8	683	B	C	72	B
7 1/2 J	6 1/2 J, 7J, 8J, 8 1/2 J	244,1	690,7	B	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	193,7	727,3	B	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	195,5	576	C	C	72	B
6J	5 1/2 J, 6 1/2 J, 7J	195,5	601,6	C	C	72	B
6 1/2 J	5 1/2 J, 6J, 7J, 7 1/2 J	208	641,7	C	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J	219,8	653,2	C	C	72	B
7J	6J, 6 1/2 J, 7 1/2 J, 8J	231,2	657,9	B	C	72	B
6 1/2 J	6J, 7J, 7 1/2 J	193,2	583,1	C	C	72	B
7J	7J, 7 1/2 J, 8J	207,8	608	C	C	72	B
7J	6 1/2 J, 7J, 7 1/2 J	202,4	621	B	C	72	B
7J	7J, 7 1/2 J, 8J	213	626	B	C	72	B
7 1/2 J	7J, 8J, 8 1/2 J	225	632,8	C	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	236,3	651	C	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	242	651	D	C	72	B
7,5J	7J, 8J, 8 1/2 J	225	658	C	C	72	B
7,5J	7J, 8J, 8 1/2 J	225	658	C	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	238	672	B	C	72	B
8J	7 1/2 J, 8 1/2 J, 9J	242,4	679	B	C	72	B
7,5J	7J, 8J, 8 1/2 J	221,4	690,4	C	C	72	B
8,5J	8J, 9J, 9 1/2 J	245	635	C	C	72	B
8J	7 1/2 J, 8J, 8 1/2 J, 9J	228,4	635,7	C	C	72	B
8,5J	8J, 9J, 9 1/2 J	235,3	649	B	C	72	B
8,5J	8J, 9J, 9 1/2 J	244,8	657,5	B	C	72	B
8,5J	8J, 9J, 9 1/2 J	235,5	675	C	C	72	B
8,5J	8J, 9J, 9 1/2 J	238,6	651,3	C	C	72	B
8 1/2 J	8J, 9J, 9 1/2 J	238,5	662,1	C	C	72	B
9J	8 1/2 J, 9 1/2 J, 10J	253	666,2	B	C	72	B

Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.



W860 ArcTerrain

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
175/70 R13	82	T	475	190	36
175/65 R14	82	T	475	190	36
185/65 R14	86	T	530	190	36
185/65 R15	88	T	560	190	36
195/65 R15	91	T	615	190	36
205/65 R15	94	T	670	190	36
185/60 R15 RF	88	T	560	190	42
195/60 R15	88	T	560	190	36
205/60 R16	92	T	630	190	36
205/60 R16 RF	96	T	710	190	42
195/55 R16	87	T	545	190	36
205/55 R16	91	T	615	190	36
215/55 R16 RF	97	T	730	190	42
215/55 R17 RF	98	T	750	190	42
225/55 R17 RF	101	T	825	190	42
215/50 R17 RF	95	T	690	190	42
225/50 R17 RF	98	T	750	190	42
225/45 R17 RF	94	T	670	190	42

PolarMaxx

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
155/80 R13	79	T	437	190	36
165/80 R13	83	T	487	190	36
155/70 R13	75	T	387	190	36
165/70 R13	79	T	437	190	36
175/70 R13	82	T	475	190	36
165/70 R14	81	T	462	190	36
175/70 R14	84	T	500	190	36
175/70 R14 RF	88	T	560	190	42
185/70 R14	88	T	560	190	36
155/65 R13	73	T	365	190	36
155/65 R14	75	T	387	190	36
165/65 R14	79	T	437	190	36
175/65 R14	82	T	475	190	36
175/65 R14 RF	86	T	530	190	42
185/65 R14	86	T	530	190	36
175/65 R15	84	T	500	190	36
185/65 R15	88	H	560	210	36
185/65 R15 RF	92	H	630	210	42
195/65 R15	91	H	615	210	36
195/65 R15 RF	95	H	690	210	42
205/65 R15	94	H	670	210	36
205/65 R16	95	H	690	210	36
185/60 R14	82	H	475	210	36
185/60 R15 RF	88	H	560	210	42
195/60 R15	88	H	560	210	36
205/60 R16 RF	96	H	710	210	42
205/60 R16 RF RFT	96	H	710	210	42
185/55 R15	82	H	475	210	36
195/55 R15	85	H	515	210	36
185/55 R16 RF	87	H	545	210	42
195/55 R16	87	H	545	210	36
205/55 R16	91	H	615	210	36
205/55 R16 RFT	91	H	615	210	36
195/50 R15*	82	H	475	210	36
195/50 R16 RF	88	H	560	210	42

*Sizes with rim guard

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.


*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5J	4.50B, 4 1/2J, 5.00B, 5.50B, 5 1/2J, 6.00B, 6J	180	574	C	D	70	B
5J	5.00B, 5.50B, 5 1/2J, 6J	178,5	583	C	D	70	B
5 1/2J	5J, 6J, 6 1/2J	188,1	599,4	C	D	70	B
5 1/2J	5J, 6J, 6 1/2J	184,3	623,3	C	D	70	B
6J	5 1/2J, 6 1/2J, 7J	199,7	635,3	B	D	70	B
6J	5 1/2J, 6 1/2J, 7J, 7 1/2J	209,9	649,7	B	C	70	B
5 1/2J	5J, 6J, 6 1/2J	184	603,5	B	D	70	B
6J	5 1/2J, 6 1/2J, 7J	202,2	613,1	C	D	70	B
6J	5 1/2J, 6 1/2J, 7J, 7 1/2J	205,6	656	B	C	70	B
6J	5 1/2J, 6 1/2J, 7J, 7 1/2J	207,3	656,4	B	C	70	B
6J	5 1/2J, 6 1/2J, 7J	201,8	619,4	C	D	70	B
6,5J	5 1/2J, 6J, 7J, 7 1/2J	212,5	630	C	C	70	B
7J	6J, 6 1/2J, 7 1/2J	224,7	647,8	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J	221,6	674,2	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J, 8J	231,1	682,8	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J	224	647	B	C	72	B
7J	6J, 6 1/2J, 7 1/2J, 8J	229,9	657	B	C	72	B
7 1/2J	7J, 8J, 8 1/2J	226,9	634,4	C	C	72	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
4 1/2J	4.00B, 4J, 4.50B, 4 1/2J, 5.00B, 5J	155,1	576,5	D	B	71	B
4 1/2J	4.00B, 4J, 4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J	162,4	590,8	C	B	71	B
4 1/2J	4.00B, 4J, 4.50B, 4 1/2J, 5.00B, 5J	156,3	549,4	D	B	71	B
5J	4.00B, 4J, 4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J	169,8	561,5	C	B	71	B
5J	4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J, 6.00B, 6J	176,8	577,4	C	B	71	B
5J	4J, 4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J	170,2	589,8	C	B	71	B
5J	4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J, 6J	174,5	604,2	C	B	71	B
5J	4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J, 6J	174,5	604,2	C	B	71	B
5 1/2J	4 1/2J, 5J, 5 1/2J, 6J	193,1	616,2	C	B	71	B
4 1/2J	4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J	152,5	531,6	D	B	71	B
4 1/2J	4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J	154,4	560,5	D	B	71	B
5J	4.50B, 4 1/2J, 5.00B, 5J, 5.50B, 5 1/2J, 6J	168,5	571,7	C	B	71	B
5J	5.00B, 5J, 5.50B, 5 1/2J, 6J	176,7	587	C	B	71	B
5J	5.00B, 5J, 5.50B, 5 1/2J, 6J	176,7	587	C	B	71	B
5 1/2J	5J, 5 1/2J, 6J, 6 1/2J	191,7	596,5	C	B	71	B
5J	5J, 5 1/2J, 6J	175,1	611,8	C	B	71	B
5 1/2J	5J, 5 1/2J, 6J, 6 1/2J	188,1	623,3	C	B	71	B
5 1/2J	5J, 5 1/2J, 6J, 6 1/2J	188,1	623,3	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	202,8	635	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	202,8	635	B	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	211	647,8	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	212,1	673,5	C	B	71	B
5 1/2J	5J, 5 1/2J, 6J, 6 1/2J	187,8	579,6	C	B	71	B
5 1/2J	5J, 5 1/2J, 6J, 6 1/2J	184	602,9	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	198,9	615,9	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	207,2	655,4	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	207,2	655,4	D	B	71	B
6J	5J, 5 1/2J, 6J, 6 1/2J	194	585	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	204,2	594,9	C	B	71	B
6J	5J, 5 1/2J, 6J, 6 1/2J	193,5	613,7	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	199,5	622	C	B	71	B
6 1/2J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	209,3	632,8	C	B	71	B
6 1/2J	5 1/2J, 6J, 7J, 7 1/2J	211,7	632,2	D	C	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	194,8	581,2	C	B	71	B
6J	5 1/2J, 6J, 6 1/2J, 7J	194	606,4	C	B	71	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

PolarMaxx Sport

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
215/65 R16 RF	102	H	850	210	42
215/60 R16 RF	99	H	775	210	42
235/60 R16*	100	H	800	210	36
215/55 R16 RF	97	H	730	210	42
225/55 R16 RF*	99	H	775	210	42
205/55 R17 RF	95	V	690	240	42
215/55 R17 RF*	98	V	750	240	42
225/55 R17 RF*	101	V	825	240	42
235/55 R17 RF*	103	V	875	240	42
205/50 R17 RF*	93	V	650	240	42
215/50 R17 RF*	95	V	690	240	42
225/50 R17 RF*	98	V	750	240	42
215/50 R18 *	92	V	630	240	36
225/50 R18 RF*	99	V	775	240	42
245/50 R18 RF*	104	V	900	240	42
205/45 R17 RF*	88	V	560	240	42
215/45 R17 RF*	91	V	615	240	42
225/45 R17 RF*	94	V	670	240	42
235/45 R17 RF*	97	V	730	240	42
245/45 R17 RF*	99	V	775	240	42
215/45 R18 RF*	93	V	650	240	42
225/45 R18 RF*	95	V	690	240	42
225/45 R18 RF RFT*	95	V	690	240	42
235/45 R18 RF*	98	V	750	240	42
245/45 R18 RF*	100	V	800	240	42
235/45 R19 RF*	99	V	775	240	42
245/45 R19 RF*	102	V	850	240	42
245/40 R17 RF*	95	V	690	240	42
225/40 R18 RF*	92	V	630	240	42
235/40 R18 RF*	95	V	690	240	42
245/40 R18 RF*	97	V	730	240	42
255/40 R18 RF*	99	V	775	240	42
225/40 R19 RF*	93	W	650	270	42
225/40 R19 RF RFT*	93	W	650	270	42
245/40 R19 RF*	98	V	750	240	42
255/40 R19 RF*	100	V	800	240	42
255/40 R20 RF*	101	W	825	270	42

*Sizes with rim guard

ST430 INCURRO A/S

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
235/75 R15	105H	925	210	36	
205/70 R15	96H	710	210	36	
215/70 R15	98H	750	210	36	
215/70 R16	100H	800	210	36	
225/70 R16 RF	107T	975	190	42	
235/70 R16	106H	950	210	36	
245/70 R16	107H	975	210	36	
255/70 R16	111T	1090	190	36	
265/70 R16	112T	1120	190	36	
215/65 R16	98H	750	210	36	
215/65 R16 RF	102H	850	210	42	
255/65 R16	109H	1030	210	36	
215/65 R17	99H	775	210	36	
225/65 R17	102H	850	210	36	
235/65 R17 RF	108H	1000	210	42	
245/65 R17 RF	111H	1090	210	42	
255/65 R17	110H	1060	210	36	
265/65 R17	112H	1120	210	36	
215/60 R16	95H	690	210	36	
235/60 R16	100H	800	210	36	
225/60 R17 RF	103H	875	210	42	
255/60 R18 RF	112V	1120	240	42	

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6 1/2J	6 J, 6 1/2 J, 7 J, 7 1/2 J	221,9	685,6	B	B	72	B
6 1/2J	6J, 6 1/2J, 7J, 7 1/2J	221,1	673,2	C	B	72	B
7J	6 1/2J, 7J, 7 1/2J, 8J, 8 1/2J	238,8	689,5	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J	229	650,3	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J, 8J	233	654	C	B	72	B
6 1/2J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	209,1	664,9	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J	220,7	676,1	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J, 8J	234,6	681,8	C	B	72	B
7 1/2J	6 1/2J, 7J, 7 1/2J, 8J, 8 1/2J	242	693	C	B	72	B
6 1/2J	5 1/2J, 6J, 6 1/2J, 7J, 7 1/2J	205,4	651,6	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J	226	648	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J, 8J	233	658	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J	224,4	678	C	B	72	B
7J	6J, 6 1/2J, 7J, 7 1/2J, 8J	232,2	686,3	C	B	72	B
7 1/2J	7J, 7 1/2J, 8J, 8 1/2J	243,8	707	C	B	72	B
7J	6 1/2J, 7J, 7 1/2J	204,4	619,7	C	B	72	B
7J	7J, 7 1/2J, 8J	213	626	C	B	72	B
7 1/2J	7J, 7 1/2J, 8J, 8 1/2J	225	634	C	B	72	B
8J	7 1/2J, 8J, 8 1/2J, 9J	236	644	C	B	72	B
8J	7 1/2 J, 8J, 8 1/2 J, 9 J	237,5	657,3	C	B	72	B
7J	7J, 7 1/2J, 8J	211,5	655,7	C	B	72	B
7 1/2J	7J, 7 1/2J, 8J, 8 1/2J	224,1	663	C	B	72	B
7 1/2J	7J, 8J, 8 1/2J	225,2	665,3	D	B	72	B
8J	7 1/2J, 8J, 8 1/2J, 9J	236,5	672,3	C	B	72	B
8J	7 1/2 J, 8J, 8 1/2 J, 9 J	237,6	685	B	B	72	B
8J	7 1/2J, 8J, 8 1/2J, 9J	236	695	C	B	72	B
8J	7 1/2 J, 8J, 8 1/2 J, 9 J	235,7	715,2	C	B	72	B
8 1/2 J	8J, 8 1/2 J, 9J, 9 1/2 J	632,2	245,1	C	B	72	B
8J	7 1/2 J, 8J, 8 1/2 J, 9J	227,7	639,5	C	B	72	B
8 1/2J	8J, 8 1/2J, 9J, 9 1/2J	238,5	648,1	C	B	72	B
8 1/2 J	8J, 8 1/2 J, 9J, 9 1/2 J	658,9	244,6	C	B	72	B
9J	8 1/2 J, 9J, 9 1/2 J, 10 J	255,4	670,4	C	B	72	B
8J	7 1/2 J, 8 J, 8 1/2 J, 9 J	227,1	665,9	C	B	72	B
8J	7 1/2J, 8 1/2J, 9J	228,6	669,1	D	B	72	B
9J	8J, 8 1/2J, 9J, 9 1/2J	242,7	686,3	C	B	72	B
9J	8 1/2 J, 9J, 9 1/2 J, 10J	257,7	690,1	C	B	72	B
9J	8 1/2 J, 9J, 9 1/2 J, 10J	257,4	714,3	C	B	72	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6 1/2J	6J, 7J, 7 1/2J, 8J	241	728	C	D	71	B
6J	5J, 5 1/2J, 6 1/2J, 7J	209	674	C	D	71	B
6 1/2J	5 1/2J, 6J, 7J	229	680	C	D	71	B
6 1/2J	5 1/2J, 6J, 7J	229	705	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J	234	719	C	D	71	B
7J	6J, 6 1/2J, 7 1/2J, 8J	246	731	C	D	71	B
7J	6 1/2J, 7 1/2J, 8J	248	750	C	D	71	B
7 1/2J	6 1/2J, 7J, 8J, 8 1/2J	260	764	C	D	72	B
8J	7J, 7 1/2J, 8 1/2J, 9J	272	778	C	D	72	B
6 1/2J	6J, 7J, 7 1/2J	224	689	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J	224	689	C	D	71	B
7 1/2J	7J, 8J, 8 1/2J, 9J	264	734	C	D	72	B
6 1/2J	6J, 7J, 7 1/2J	222	712	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J, 8J	230	724	C	D	71	B
7J	6 1/2J, 7 1/2J, 8J, 8 1/2J	240	739	C	D	71	B
7J	7 1/2J, 8J, 8 1/2J	247	748	C	D	71	B
7 1/2J	7J, 8J, 8 1/2J, 9J	263	761	C	D	72	B
8J	7 1/2J, 8 1/2J, 9J, 9 1/2J	276	773	C	D	72	B
6 1/2J	6J, 7J, 7 1/2J	222	662	C	D	71	B
7J	6 1/2J, 7 1/2J, 8J, 8 1/2J	241	684	C	D	71	B
6 1/2J	6J, 7J, 7 1/2J, 8J	228	703	C	D	71	B
7 1/2J	7J, 8J, 8 1/2J, 9J	257,6	763,6	B	D	72	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

ST440 INCURRO A/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
205/80 R16 RF*	104	T	850	180	35
235/75 R15*	105	T	925	190	36
255/70 R15*	108	T	1000	190	36
265/70 R15 RF*	116	T	1250	190	42
235/70 R16*	106	T	950	190	36
245/70 R16 RF*	111	T	1090	190	42
215/65 R16*	98	T	750	190	36
265/65 R17 RF*	116	S	1250	180	42
255/60 R18 RF*	112	H	1120	210	42
265/60 R18 RF*	114	T	1180	190	42

*Sizes with rim guard

ST450 INCURRO H/T

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE (Psi/Bar)
225/65 R17*	102	H	850	210	36
235/65 R17 RF	108	V	1000	240	42
215/60 R17*	96	V	710	240	36
235/60 R17*	102	V	850	240	36
255/60 R17*	106	V	950	240	36
225/60 R18*	100	H	800	210	36
235/60 R18 RF*	107	V	975	240	42
245/60 R18*	105	H	925	210	36
255/60 R18 RF*	112	V	1120	240	42
265/60 R18*	110	H	1060	210	36
265/60 R18*	110	V	1060	240	36
225/55 R17*	97	V	730	240	36
235/55 R17 RF*	103	V	875	240	42
215/55 R18*	95	H	690	210	36
225/55 R18*	98	V	750	240	36
235/55 R18*	100	V	800	240	36
255/55 R18 RF*	109	V	1030	240	42
225/55 R19*	99	H	775	210	36
235/55 R19 RF*	105	V	925	240	42
245/55 R19*	103	H	875	210	36
255/55 R19 RF*	111	V	1090	240	42
275/55 R19*	111	V	1090	240	36
255/55 R20 RF*	110	Y	1060	300	42
235/50 R18 RF*	101	V	825	240	42
235/50 R19 RF*	103	W	875	270	42
255/50 R19 RF*	107	V	975	240	42
255/50 R19 RF RFT*	107	W	975	270	42
265/50 R19 RF*	110	W	1060	270	42
255/50 R20 RF*	109	Y	1030	300	42
275/45 R19 RF*	108	W	1000	270	42
285/45 R19*	107	V	975	240	36
255/45 R20 RF*	105	Y	925	300	42
275/45 R20 RF*	110	W	1060	270	42
285/45 R20 RF*	112	Y	1120	300	42
275/45 R21 RF*	110	Y	1060	300	42
275/40 R20*	102	W	850	270	36
275/40 R20 RF RFT*	106	Y	950	300	42
295/35 R21 RF*	107	Y	975	300	42
275/40 R22 RF*	108	Y	1000	300	42

*Sizes with rim guard

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6J	5½J, 6½J, 7J	218	728	D	D	71	B
6½J	6J, 7J, 7½J, 8J	244	726	D	D	71	B
7½J	6½J, 7J, 8J, 8½J	271	732	D	D	72	B
8J	7J, 7½J, 8½J, 9J	273	746	D	D	73	B
7J	6J, 6½J, 7½J, 8J	241	731	D	D	71	B
7J	6½J, 7½J, 8J	248	750	D	D	71	B
6½J	6J, 7J, 7½J	228	678	D	D	71	B
8J	7½J, 8½J, 9J, 9½J	271,2	770,9	D	D	73	B
7½J	7J, 8J, 8½J, 9J	253,1	762	D	D	72	B
8J	7½J, 8½J, 9J, 9½J	263	773	D	D	73	B



RIM		INFLATED DIEMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J, 8J	226,6	724,5	C	B	71	B
7J	6½J, 7½J, 8J, 8½J	240	738	B	B	71	B
6½J	6J, 7J, 7½J	221	690	C	B	71	B
7J	6½J, 7½J, 8J, 8½J	240	714	C	B	71	B
7½J	7J, 8J, 8½J, 9J	260	736	C	B	71	B
6½J	6J, 7J, 7½J, 8J	228	727	C	B	71	B
7J	6½J, 7½J, 8J, 8½J	240	739	B	B	71	B
7J	7½J, 8J, 8½J	248	751	B	B	71	B
7½J	7J, 8J, 8½J, 9J	261	763	B	B	71	B
8J	7½J, 8½J, 9J, 9½J	272	775	B	B	71	B
8J	7½J, 8½J, 9J, 9½J	272	775	B	B	71	B
7J	6J, 6½J, 7½J, 8J	233	680	C	B	71	B
7½J	6½J, 7J, 8J, 8½J	245	690	C	B	71	B
7J	6J, 6½J, 7½J	226	693	C	B	71	B
7J	6J, 6½J, 7½J, 8J	233	705	C	B	71	B
7½J	6½J, 7J, 8J, 8½J	245	715	C	B	71	B
8J	7J, 7½J, 8½J, 9J	262	735	B	B	71	B
7J	6J, 6½J, 7½J, 8J	233	731	C	B	71	B
7½J	6½J, 7J, 8J, 8½J	245	741	C	B	71	B
7½J	7J, 8J, 8½J	253	753	C	B	71	B
8J	7J, 7½J, 8½J, 9J	260	761	C	B	71	B
8½J	7½J, 8J, 9J, 9½J	283	783	C	B	71	B
8J	7J, 7½J, 8½J, 9J	262,6	791	B	B	71	B
7½J	6½J, 7J, 8J, 8½J	240	688	B	B	71	B
7½J	6½J, 7J, 8J, 8½J	238,9	722,9	C	B	71	B
8J	7J, 7½J, 8½J, 9J	265	739	B	B	71	B
8J	7J, 7½J, 8½J, 9J	258	745	C	B	71	B
8½J	7½J, 8J, 9J, 9½J	277	749	B	B	71	B
8J	7J, 7½J, 8½J, 9J	259,4	769	B	B	71	B
9J	8½J, 9,5J, 10J, 10½J	268	731	C	B	71	B
9½J	9J, 10J, 10½J	283	740	C	B	71	A
8½J	8J, 9J, 9½J	253,6	742,9	C	B	71	B
9J	8½J, 9,5J, 10J, 10½J	270	758	B	B	71	B
9½J	9J, 10J, 10½J	280,8	759,2	B	B	71	A
9J	8½J, 9½J, 10J, 10½J	273,6	783	C	B	71	B
9½J	9J, 10J, 10½J, 11J	273	729	D	B	71	B
9½J	9J, 10J, 10½J, 11J	276,5	724,5	D	B	71	B
10½J	10J, 11J, 11½J	295,8	743,3	C	B	71	A
9½J	9J, 10J, 10½J, 11J	277,8	783,4	B	B	71	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SuvMaxx A/S

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
215/65 R17 RF*	103	V	875	240	42
235/65 R17 RF*	108	W	1000	270	42
215/60 R17 RF*	100	V	800	240	42
225/60 R18 RF*	104	W	900	270	42
235/60 R18 RF*	107	W	975	270	42
215/55 R18 RF*	99	V	775	240	42
225/55 R18 RF*	102	V	850	240	42
235/55 R18 RF*	104	V	900	240	42
235/55 R19 RF*	105	W	925	270	42
255/55 R18 RF*	109	W	1030	270	42
215/50 R18*	92	W	630	270	36
235/50 R18 RF*	101	W	825	270	42
235/45 R19 RF*	99	W	775	270	42
245/45 R19 RF*	102	W	850	270	42

*Sizes with rim guard

W870 INCURRO

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
205/80 R16 RF	104T	900	190	41	
235/75 R15 RF	109T	1030	190	42	
205/70 R15	96T	710	190	36	
215/70 R15	98H	750	210	36	
215/70 R16 RF	104H	900	210	42	
225/70 R16 RF	107H	975	210	42	
235/70 R16	106T	950	190	36	
245/70 R16 RF	111T	1090	190	42	
255/70 R16	111T	1090	190	36	
265/70 R16	112T	1120	190	36	
215/65 R17	99H	775	210	36	
225/65 R17 RF	106h	950	210	42	
235/65 R17 RF	108V	1000	240	42	
245/65 R17 RF	111H	1090	210	42	
255/65 R17 RF	114H	1180	210	42	
265/65 R17 RF	116H	1250	210	42	
215/60 R17 RF	100H	800	210	42	
225/60 R17 RF	103V	875	240	42	
235/60 R17 RF	106H	950	210	42	
255/60 R17 RF	110V	1060	240	42	
225/60 R18 RF	104V	900	240	42	
235/60 R18 RF	107H	975	210	42	
245/60 R18 RF	105H	925	210	36	
255/60 R18 RF	112H	1120	210	42	
265/60 R18 RF*	114H	1180	210	42	
235/55 R17 RF*	103V	875	240	42	
215/55 R18*	95H	690	210	36	
225/55 R18 RF*	102H	850	210	42	
235/55 R18 RF*	104H	900	210	42	
255/55 R18 RF*	109V	1030	240	42	
255/55 R18 RF RFT*	109H	1030	210	42	
205/55 R19 RF*	97H	730	210	42	
225/55 R19*	99H	775	210	36	
235/55 R19 RF*	105V	925	240	42	
245/55 R19*	103H	875	210	36	
255/55 R19 RF*	111V	1090	240	42	
275/55 R19*	111H	1090	210	36	
235/50 R18 RF*	101V	825	240	42	
235/50 R19 RF*	103V	875	240	42	
255/50 R19 RF*	107V	975	240	42	
255/50 R19 RF RFT*	107V	975	240	42	
245/50 R20*	102V	850	240	36	
265/50 R20 RF*	111H	1090	210	42	
225/45 R19 RF*	96V	710	240	42	
285/45 R19 RF*	111H	1090	210	42	
275/45 R20 RF*	110V	1060	240	42	
275/40 R20 RF*	106V	950	240	42	
275/40 R20 RF RFT	106V	950	240	42	
315/35 R20 RF*	110V	1060	240	42	
315/35 R20 RF RFT	110V	1060	240	42	

*Sizes with rim guard

Description



*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference, our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
6½J	6J, 7J, 7½J	214,8	717,8	B	C	72	B
7J	6½J, 7½J, 8J, 8½J	236,3	741	B	C	72	B
6½J	6J, 7J, 7½J	216,7	698,7	B	C	72	B
6½J	6J, 7J, 7½J, 8J	220,8	733,7	B	C	72	B
7J	6½J, 7½J, 8J, 8½J	236	744,5	B	C	72	B
7J	6J, 6½J, 7½J	219,2	701,6	C	C	72	B
7J	6J, 6½J, 7½J, 8J	228,2	712,4	C	C	72	B
7½J	6½J, 7J, 8J, 8½J	238,5	721,3	B	C	72	B
7½J	6½J, 7J, 8J, 8½J	240,3	749,6	B	C	72	B
8J	7J, 7½J, 8½J, 9J	258,7	746,1	B	C	72	B
7J	6J, 6½J, 7½J	219,2	680,5	D	C	72	B
7½J	6½J, 7J, 8J, 8½J	240,6	698,1	C	C	72	B
8J	7½J, 8½J, 9J	233,9	701,2	C	C	72	B
8J	7½J, 8½J, 9J	235	711,1	C	C	72	B



RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
5½J	5J, 6J, 6½J, 7J	209	728	B	C	70	B
6½J	6J, 7J, 7½J, 8J	235	732	B	C	70	B
6J	5J, 5½J, 6½J, 7J	212	667	B	C	70	B
6½J	5½J, 6J, 7J	225	680	B	C	70	B
6½J	5½J, 6J, 7J	224	710	B	C	70	B
6½J	6J, 7J, 7½J	233	724	B	C	70	B
7J	6J, 6½J, 7½J, 8J	240	736	B	C	70	B
7J	6½J, 7½J, 8J	248	750	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	260	764	B	C	71	B
8J	7J, 7½J, 8½J, 9J	272	778	B	C	71	B
6½J	6J, 7J, 7½J	218	711	B	C	70	B
6½J	6J, 7J, 7½J, 8J	229	726	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	240	738	B	C	70	B
7J	7½J, 8J, 8½J	243	752	B	C	70	B
7½J	7J, 8J, 8½J, 9J	260	762	B	C	71	B
8J	7½J, 8½J, 9J, 9½J	273	774	B	C	71	B
6½J	6J, 7J, 7½J	217	694	B	C	70	B
6½J	6J, 7J, 7½J, 8J	227	706	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	240	717	B	C	70	B
7½J	7J, 8J, 8½J, 9J	260	738	B	C	71	B
6½J	6J, 7J, 7½J, 8J	228	735	B	C	70	B
7J	6½J, 7½J, 8J, 8½J	240	744	B	C	70	B
7J	7½J, 8J, 8½J	255	755	B	C	70	B
7½J	7J, 8J, 8½J, 9J	260	766	B	C	71	B
8J	7½J, 8½J, 9J, 9½J	272	775	B	C	71	B
7½J	6½J, 7J, 8J, 8½J	244	694	B	C	70	B
7J	6J, 6½J, 7½J	222	699	C	C	70	B
7J	6J, 6½J, 7½J, 8J	228	711	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	244	721	B	C	70	B
8J	7J, 7½J, 8½J, 9J	261	743	B	C	71	B
8J	7J, 7½J, 8½J, 9J	263,7	739,8	D	C	73	B
6½J	5½J, 6J, 7J, 7½J	214	711	B	C	70	B
7J	6J, 6½J, 7½J, 8J	230	732	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	250	741	B	C	70	B
7½J	7J, 8J, 8½J	248	753	B	C	70	B
8J	7J, 7½J, 8½J, 9J	262	765	B	C	71	B
8½J	7½J, 8J, 9J, 9½J	283	785	B	C	72	B
7½J	6½J, 7J, 8J, 8½J	238	698	B	C	70	B
7½J	6½J, 7J, 8J, 8½J	245	719	B	C	70	B
8J	7J, 7½J, 8½J, 9J	258	748	B	C	71	B
8J	7J, 7½J, 8½J, 9J	265	739	C	C	71	B
7½J	7J, 8J, 8½J	255	755	B	C	70	B
8½J	7½J, 8J, 9J, 9½J	277	774	B	C	71	B
7½J	7J, 8J, 8½J	227	688	B	C	70	B
9½J	9J, 10J, 10½J	285	739	B	C	72	A
9J	8½J, 9½J, 10J, 10½J	266	760	B	C	72	B
9½J	9J, 10J, 10½J, 11J	278	728	B	C	72	B
9½J	9J, 10J, 10½J, 11J	279,6	734	C	B	72	B
11J	10½J, 11½J, 12J, 12½J	316	725	B	B	72	A
11J	10½J, 11½J, 12J, 12½J	313,5	732,7	C	B	72	A



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

W880 INCURRO ICE

TIRE SIZE	LOAD INDEX	SPEED INDEX	LOAD CAPACITY(kg)	SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)
245/70 R16 RF	111	T	1090	190	42
215/65 R16 RF	102	T	850	190	42
215/60 R17 RF	100	T	800	190	42

ST850 PROVAN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
195 R15 C	8PR	106/104	R	1900	3600

ST850 PLUS PROVAN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
5.00 R12C	8PR	83/81	P	974	1848
155 R12 C	8PR	88/86	N	1120	2120
155 R13 C	8PR	90/89	R	1200	2320
185 R14 C	8PR	102/100	R	1700	3200
195 R14 C	8PR	106/104	R	1900	3600
205 R14 C	8PR	109/107	P	2060	3900
215 R14 C	8PR	112/110	P	2240	4240
185 R15 C	8PR	103/102	R	1750	3400
175/75 R16 C	8PR	101/99	R	1650	3100
185/75 R16 C	8PR	104/102	R	1800	3400
195/75 R16 C	8PR	107/105	R	1950	3700
205/75 R16 C	8PR	110/108	R	2120	4000
205/75 R16 C	10PR	113/111	R	2300	4360
215/75 R16 C	8PR	113/111	R	2300	4360
215/75 R16 C	10PR	116/114	R	2500	4720
225/75 R16 C	10PR	118/116	R	2640	5000
165/70 R14 C	6PR	89/87	R	1160	2180
195/70 R15 C	8PR	104/102	R	1800	3400
205/70 R15 C	8PR	106/104	R	1900	3600
215/70 R15 C	8PR	109/107	S	2060	3900
225/70 R15 C	8PR	112/110	R	2240	4240
225/70 R15 C	10PR	116/114	R	2500	4720
205/65 R15 C	8PR	102/100	T	1700	3200
205/65 R16 C	8PR	107/105	T	1950	3700
215/65 R16 C	8PR	109/107	R	2060	3900
225/65 R16 C	8PR	112/110	R	2240	4240
235/65 R16 C	8PR	115/113	R	2430	4600
235/65 R16 C	12PR	121/119	R	2900	5440

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.




*All figures are for reference; our company is not responsible for printing errors.

RIM		INFLATED DIMENSION		EU TIRE LABEL			
RECOM. (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
7J	6½J, 7½J, 8J	248	749	B	C	72	B
6.5J	6J, 7J, 7½J	226	684,5	B	C	72	B
6.5J	6J, 7J, 7½J	217	694	C	C	72	B



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	65	5½J	5J, 6J	196	691	D	A	72	B



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
150	65	3½J	3½J	141	565	D	B	71	B
140	65	4½J	4,00B, 4,50B, 4J, 5J	155	552	D	B	72	B
170	65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	154	573	D	B	72	B
170	65	5½J	5J, 6J	185	650	D	A	72	B
170	65	5½J	5J, 6J	200	669	D	A	72	B
150	65	6J	5½J, 6½J	208	684	D	A	72	B
150	65	6J	5½J, 6½J, 7J	219	699	D	A	72	B
170	65	5½J	5J, 6J	186	675	D	A	72	B
170	69	5J	4 ½ J, 5½J,	170	668	D	A	72	B
170	69	5J	5½J, 6J	180	684	D	A	72	B
170	69	5½J	5J, 6J	192	698	C	A	72	B
170	69	5½J	6J, 6½J	200	712	D	A	72	B
170	76	5½J	6J, 6½J	200	712	D	A	72	B
170	69	6J	5½J, 6½J, 7J	216	734	C	A	72	B
170	76	6J	5½J, 6½J, 7J	216	734	D	A	72	B
170	80	6J	6½J, 7J	224	740	D	A	72	B
170	54	5J	4½J	167	592	D	B	72	B
170	65	6J	5J, 5½J	196	651	D	A	72	B
170	65	6J	5½J, 6½J	206	668	D	A	72	B
180	65	6½J	5½J, 6J, 7J	222	679	D	A	72	B
170	65	6½J	6J, 7J	225	696	D	A	72	B
170	80	6½J	6J, 7J	225	696	D	A	72	B
190	54	6J	5½J, 6½J	206	650	D	A	72	B
190	69	6J	5½J, 6½J	206	677	D	A	71	B
170	69	6½J	6J, 7J	219	684	D	A	72	B
170	69	6½J	6J, 7J	223	702	D	A	72	B
170	69	7J	6½J, 7½J	238	717	D	A	72	B
170	83	7J	6½J, 7½J	238	717	D	A	72	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

ST860 PROVAN

TIRE SIZE	PR	LOAD INDEX	SPEED INDEX	LOAD CAPACITY (kg)	
				2 WHEELED MAXIMUM LOAD PER AXLE (kg)	4 WHEELED MAXIMUM LOAD PER AXLE(kg)
205/75 R16 C	8PR	110/108	R	2120	4000
215/75 R16 C	8PR	113/111	R	2300	4360
215/75 R16 C	10PR	116/114	R	2500	4720
225/70 R15 C	8PR	112/110	R	2240	4240
215/65 R15 C	6PR	104/102	T	1800	3400
195/65 R16 C	8PR	104/102	T	1800	3400
205/65 R16 C	8PR	107/105	T	1950	3700
215/65 R16 C	8PR	109/107	T	2060	3900
235/65 R16 C	8PR	115/113	R	2430	4600
235/65 R16 C	12PR	121/119	R	2900	5440
285/65 R16 C	10PR	128	N	3600	-
195/60 R16 C	6PR	99/97	T	1550	2920

ST950 PROWIN

TIRE SIZE	PR	LOAD/SPEED INDEX	LOAD CAPACITY (kg)
155 R12 C	8PR	88/86N	1120 / 2120
155 R13 C	8PR	90/89N	1200 / 2320
185 R14 C	8PR	102/100R	1700 / 3200
195 R14 C	8PR	106/104R	1900 / 3600
175/75 R16 C	8PR	101/99R	1650 / 3100
185/75 R16 C	8PR	104/102R	1800 / 3400
195/75 R16 C	8PR	107/105R	1950 / 3700
205/75 R16 C	8PR	110/108R	2120 / 4000
215/75 R16 C	8PR	113/111R	2300 / 4360
225/75 R16 C	8PR	118/116R	2640 / 5000
225/75 R16 C	10PR	118/116R	2640 / 5000
195/70 R15 C	8PR	104/102R	1800 / 3400
205/70 R15 C	8PR	106/104R	1900 / 3600
215/70 R15 C	8PR	109/107R	2060 / 3900
225/70 R15 C	8PR	112/110R	2240 / 4240
205/65 R15 C	8PR	102/100T	1700 / 3200
205/65 R16 C	8PR	107/105T	1950 / 3700
215/65 R16 C	8PR	109/107R	2060 / 3900
225/65 R16 C	8PR	112/110R	2240 / 4240
235/65 R16 C	8PR	115/113R	2430 / 4600
195/60 R16 C	6PR	99/97T	1550 / 2920

Description



*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
170	69	5½J	6J, 6½J	201	709	C	A	71	B
170	69	6J	5½J, 6½J, 7J	216	728	C	A	71	B
170	76	6J	5½J, 6½J, 7J	213	723	C	A	71	B
170	65	6½J	6J, 7J	227	694	C	A	72	B
190	54	6½J	6J, 7J	218	660	C	A	71	B
190	69	6J	5½J	201	660	C	A	71	B
190	69	6J	5½J, 6½J	205	674	C	A	71	B
190	69	6½J	6J, 7J	218	682	C	A	71	B
170	69	7J	6½J, 7½J	240	716	C	A	72	B
170	83	7J	6½J, 7½J	240	716	C	A	72	B
140	76	8½J	8J, 9J	298	777	D	A	69	A
190	54	6J	5½J, 6½J	201	645	C	A	71	B



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	157	551	D	A	71	B
140	65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	D	A	71	B
170	65	5½J	5J, 6J	188	650	D	A	71	B
170	65	5½J	5J, 6J	198	669	D	A	72	B
170	69	5J	4 ½ J, 5½J,	172	672	D	A	71	B
170	69	5J	5½J, 6J	180	692	D	A	71	B
170	69	5½J	5j, 6j	196	708	D	A	72	B
170	69	5½J	6J, 6½J	203	718	D	A	72	B
170	69	6J	5½J, 6½J, 7J	216	734	C	A	72	B
170	76	6J	6½J, 7J	223	744	C	A	72	B
170	80	6J	6½J, 7J	223	744	C	A	72	B
170	65	6J	5J, 5½J	201	655	D	A	72	B
170	65	6J	5½J, 6½J	209	669	D	A	72	B
170	65	6½J	5½J, 6J, 7J	221	683	D	A	72	B
170	65	6½J	6J, 7J	228	697	C	A	72	B
190	54	6J	5½J, 6½J	209	647	D	A	72	B
190	69	6J	5½J, 6½J	209	672	D	A	72	B
170	69	6½J	6J, 7J	221	687	D	A	72	B
170	69	6½J	6J, 7J	228	699	C	A	72	B
170	69	7J	6½J, 7½J	240	712	C	A	72	B
190	54	6J	5½J, 6½J	201	640	D	A	72	B



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

ST960 PROWIN

TIRE SIZE	PR	LOAD/SPEED INDEX	LOAD CAPACITY (kg)
155 R12 C	8PR	88/86N	1120 / 2120
155 R13 C	8PR	90/89N	1200 / 2320
185 R14 C	8PR	102/100R	1700 / 3200
195 R14 C	8PR	106/104R	1900 / 3600
185/75 R16 C	8PR	104/102R	1800 / 3400
195/75 R16 C	8PR	107/105R	1950 / 3700
205/75 R16 C	10PR	113/111R	2300 / 4360
215/75 R16 C	10PR	116/114R	2500 / 4720
225/75 R16 C	8PR	118/116R	2640 / 5000
195/70 R15 C	8PR	104/102R	1800 / 3400
205/70 R15 C	8PR	106/104R	1900 / 3600
215/70 R15 C	8PR	109/107R	2060 / 3900
225/70 R15 C	8PR	112/110R	2240 / 4240
195/65 R16 C	6PR	104/102T	1800 / 3400
205/65 R16 C	8PR	107/105T	1950 / 3700
215/65 R16 C	8PR	109/107R	2060 / 3900
215/65 R15 C	8PR	104/102T	1800 / 3400
225/65 R16 C	8PR	112/110R	2240 / 4240
235/65 R16 C	8PR	115/113R	2430 / 4600
235/65 R16 C	12PR	121/119R	2900 / 5440
285/65 R16 C	10PR	128N	3600 / -
195/60 R16 C	6PR	99/97T	1550 / 2920

VANMAXX A/S

TIRE SIZE	LOAD/SPEED INDEX	LOAD CAPACITY (kg)
155 R12 C	88/86N	1120 / 2120
155 R13 C	90/89R	1200 / 2320
185 R14 C	102/100R	1700 / 3200
185/75 R16 C	104/102R	1800 / 3400
195/75 R16 C	107/105R	1950 / 3700
205/75 R16 C	113/111R	2300 / 4360
215/75 R16 C	116/114R	2500/4720
225/75 R16 C	118/116R	2640 / 5000
195/70 R15 C	104/102R	1800 / 3400
215/70 R15 C	109/107S	2060 / 3900
225/70 R15 C	116/114R	2500 / 4720
205/65 R16 C	107/105T	1950 / 3700
215/65 R15 C	104/102T	1800 / 3400
215/65 R16 C	109/107T	2060 / 3900
225/65 R16 C	112/110R	2240 / 4240
235/65 R16 C	121/119R	2900 / 5440
285/65 R16 C	131R	3900 / -
195/60 R16 C	99/97T	1550 / 2920
215/60 R17 C	109/107T	2060 / 3900

Description




*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.




*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4,00B, 4,50B, 4J, 5J	154	550	E	B	72	A
140	65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	578	E	B	72	A
170	65	5½J	5J, 6J	188	650	D	B	72	A
170	65	5½J	5J, 6J	198	666	D	B	72	A
170	69	5J	5½J, 6J	184	684	D	B	72	A
170	69	5½J	5J, 6J	196	698	D	B	72	A
170	76	5½J	6J, 6½J	203	711	D	B	72	A
170	76	6J	5½J, 6½J, 7J	216	728	C	A	72	A
170	76	6J	6½J, 7J	225	747	C	A	72	A
170	65	6J	5J, 5½J	198	661	D	B	72	A
170	65	6J	5½J, 6½J	221	673	D	B	72	A
170	65	6½J	5½J, 6J, 7J	220	684	D	A	72	A
170	65	6½J	6J, 7J	222	698	D	A	72	A
190	69	6J	5½J	201	660	D	B	72	A
190	69	6J	5½J, 6½J	200	677	D	B	72	A
170	69	6½J	6J, 7J	215	690	D	A	72	A
190	54	6½J	6J, 7J	211	660	D	A	72	A
170	69	6½J	6J, 7J	228	698	D	A	72	A
170	69	7J	6½J, 7½J	238	716	C	A	72	A
170	83	7J	6½J, 7½J	238	716	D	A	72	A
140	76	8½J	8J, 9J	297	778	D	A	71	A
190	54	6J	5½J, 6½J	201	640	D	B	72	A



SPEED LIMIT(km/h)	INFLATED PRESSURE(Psi/Bar)	RIM		INFLATED DIMENSION		EU TIRE LABEL			
		RECOM (inch)	PERMITTED (inch)	SECTION WIDTH (mm)	OUTER DIAMETER (mm)			DB	
140	65	4½J	4.00B 4J 4.50B 4,5J 5J	159,2	548,8	D	A	72	B
170	65	4½J	4,00B, 4,50B, 4J, 5,00B, 5J	157	576	D	B	69	A
170	65	5½J	5J, 6J	188	649	D	B	69	A
170	69	5J	5½J, 6J	179	687	D	B	69	A
170	69	5½J	5J, 6J	192	699	C	B	69	A
170	76	5½J	6J, 6½J	201	713	C	B	69	A
170	76	6J	5½J-6½J-7J	216,4	725,1	C	A	72	B
170	80	6J	6½J, 7J	222	744	C	B	69	A
170	65	6J	5J, 5½J	200	655	C	B	69	A
180	65	6½J	5½J, 6J, 7J	218	685	C	B	69	A
170	80	6½J	6J, 7J	225	695	C	B	69	A
190	69	6J	5½J, 6½J	204	672	C	B	69	B
190	54	6½J	6J, 7J	215	655	D	B	69	A
190	69	6½J	6J, 7J	219	684	C	B	69	A
170	69	6½J	6J, 7J	222	699	C	B	69	A
170	83	7J	6½J, 7½J	237	715	C	A	69	A
170	83	8½J	8J, 9J	296	776	D	A	71	A
190	54	6J	5½J, 6½J	201	644	D	B	69	A
190	69	6½J	6J, 7J	215	695	C	B	69	A



Description

*For load capacity on various speeds, and inflation figures, please consult your sales representative.

*Load capacity on standard speed and weight.

*Our company is entitled to make any change on any information in this catalogue, without further notice.

*This catalogue annuls all the previous catalogues.

*All figures are for reference; our company is not responsible for printing errors.

Starmaxx Passenger, Light Truck and 4x4 Suv Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.





*The visual content of the catalogue is only representative. To find the compatible tire for your car, please refer to the car service or authorized dealer.'


2024 EDITION

Starmaxx Passenger, PCR - 4x4 & SUV - LTR Tires are characterized by quality workmanship, leading edge technology, unique tread designs and excellent performance offering perfect mix of quality and value.

Our success depends on exceeding the expectations of our customers and standing behind everything we do.

Our aim is to build long term relationships with our customers by providing excellent service, quality and delivering our promises.

DISTRIBUTED BY



Headquarters - Factory

Petlas Tire Industry and Trade Kindam Mh. Ankara - Kayseri Cd. No: 2/1 Kırşehir/TURKEY • T: +90 386 252 65 50 • F: +90 386 252 65 70

Int. Sales & Marketing

Petlas Tire Industry and Trade Ako Kule, Söğütözü Mh. 2178. Cd. No: 6 06530 Ankara/TURKEY • T. +90 312 309 30 30 • F: +90 312 309 22 66

Petlas Tire USA

1111 E. Lincolnway STE 205 Cheyenne, WY 82001 USA

www.starmaxx.com

MADE IN TÜRKİYE

 **starmaxx**
HIGH PERFORMANCE TIRES